

ProMount HOME Catalog

Pitched roof mounting system

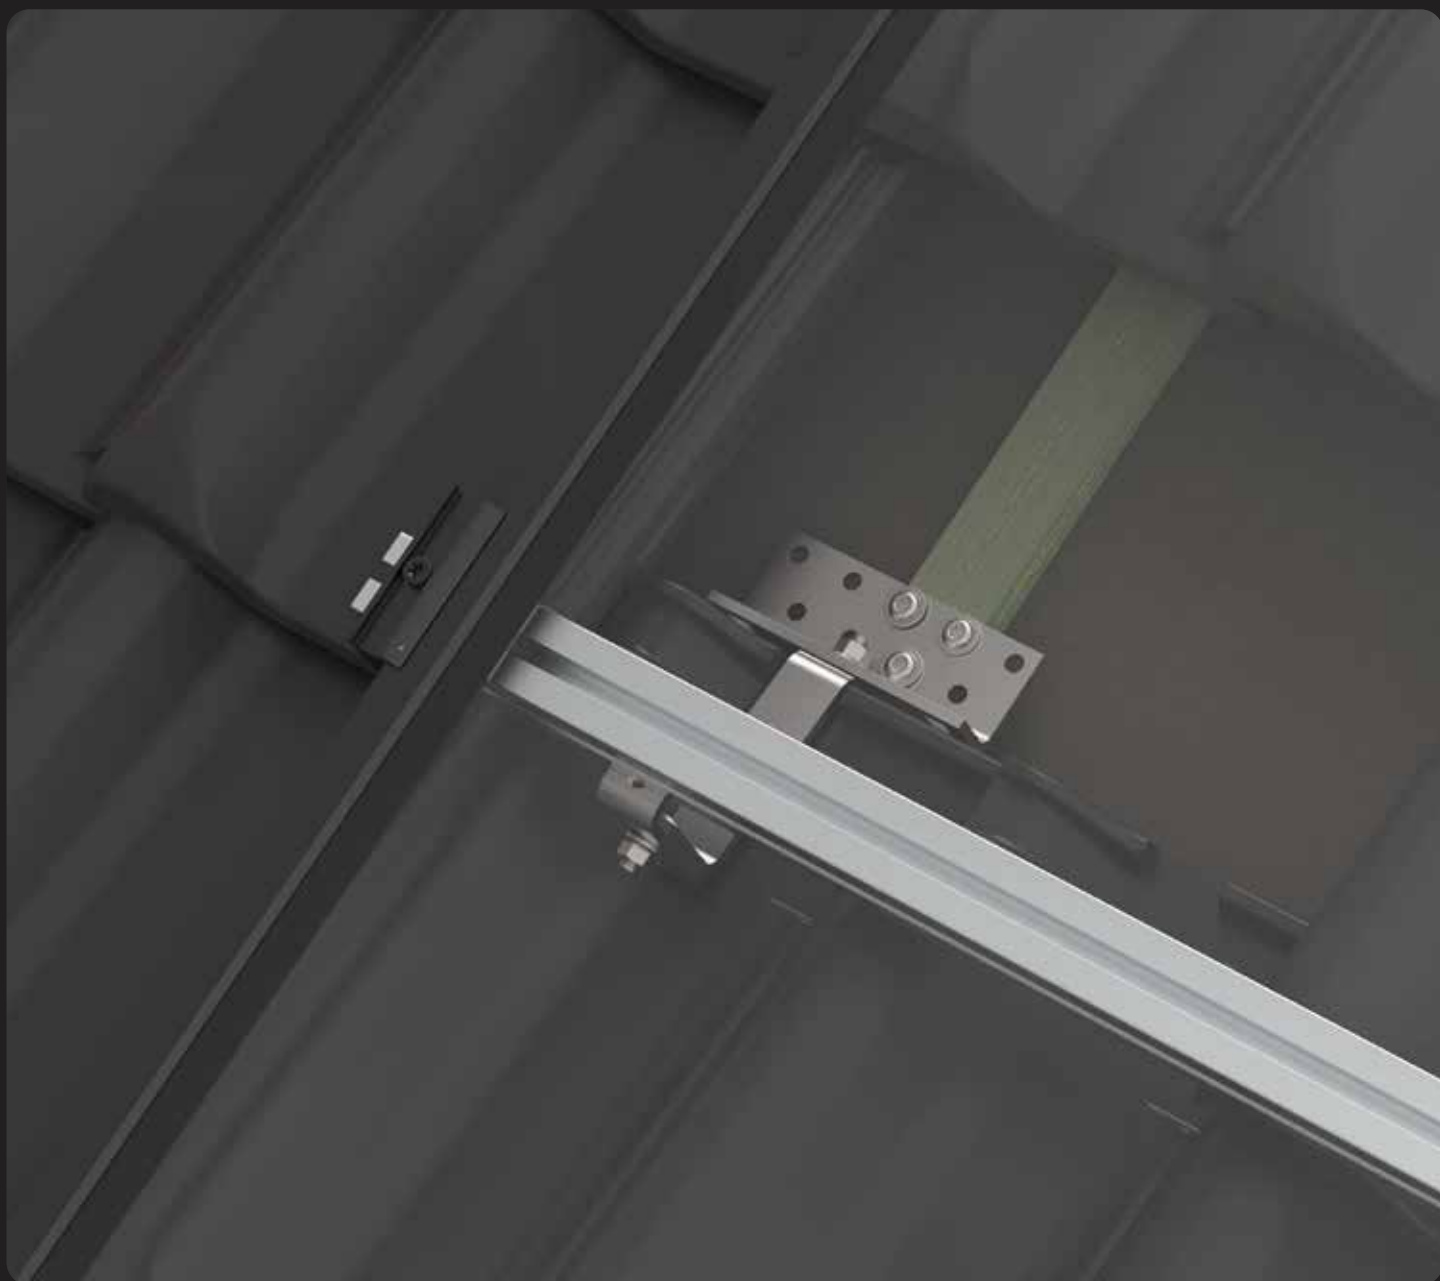


Table of content

Discover ProMount HOME

ProMount HOME is a versatile mounting system for all roof types. This on-roof system combines flexibility and speed, allowing solar panels to be installed quickly and securely in any layout. Designed for a perfect fit and proven durability, it delivers reliable performance for both residential and commercial projects.

About us	4
----------	---

System benefits	6
-----------------	---

Configurations	8
----------------	---

Tiled roofs	8
Steeldeck roofs	12
Corrugated roofs	16
Slate roofs	20
Zinc roofs	22
Bitumen/EPDM roof	24

Tested & certified	28
--------------------	----

Product sheets	30
----------------	----

ProMount calculator	66
---------------------	----

About us

At ProMount, we believe going solar shouldn't be complicated. That's why we created mounting systems that are easy to understand, quick to install, and built to last.



Our mounting systems are engineered for maximum safety, proven durability, and easy installation—helping you complete projects faster and with total confidence. We deliver on our promises with on-time delivery, clear guidance, and solutions that keep performing for years to come.

People are at the heart of everything we do. Our team brings together a wide range of expertise to create, deliver, and support solar mounting solutions that are reliable and easy to use. By combining our knowledge and commitment, we make every project run smoothly from start to finish.

System benefits

Universal system

ProMount HOME is a truly universal mounting system, compatible with all common roof types. This flexibility allows it to adapt to any layout or project requirement. Ideal for both residential and commercial installations.

Fast and efficient installation

The system is designed to simplify installation and reduce on-site time. Smart design choices enable quick alignment, easy mounting and minimal tooling. Installers work faster with less effort, improving overall project efficiency.

Strong, durable and future-proof


Engineered for long-term reliability, the system combines strength with a lightweight design. It delivers high structural stability, improved sustainability and proven performance. Fully tested and certified for safe, dependable use in real-world conditions.



Tiled Roof



Components

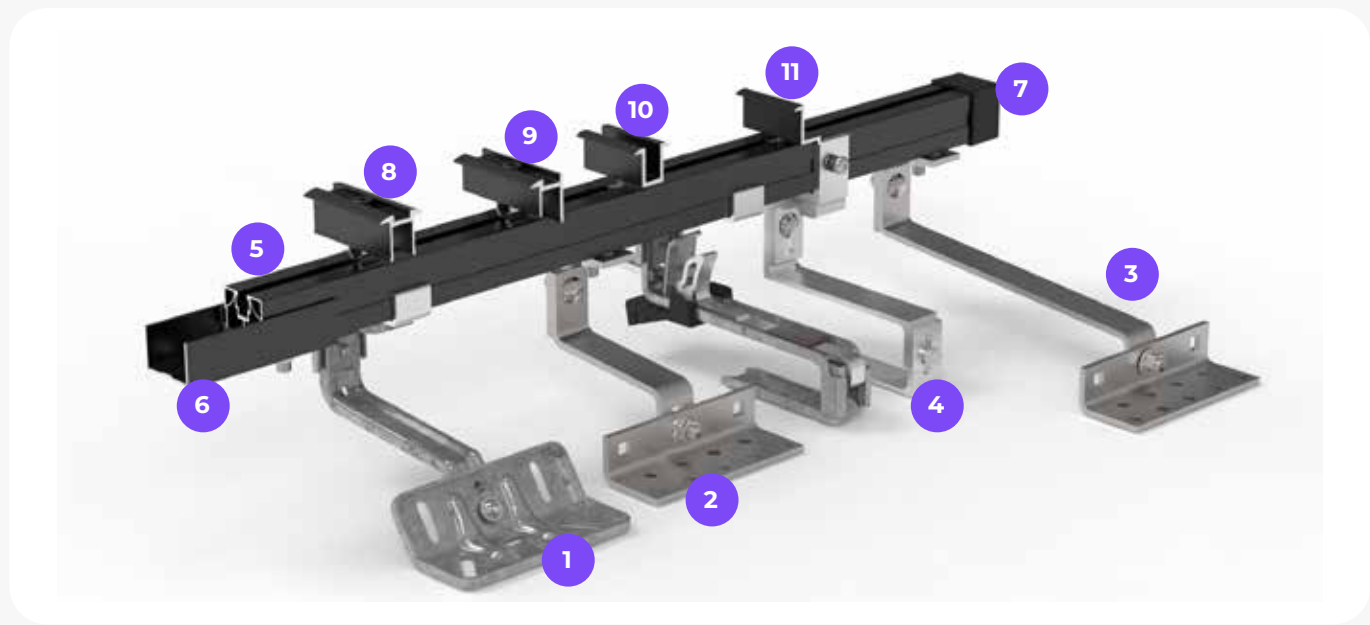

Article code	Article description
--------------	---------------------



1HME15DD009	Roof hook Optimum
-------------	-------------------



1HME15DD001	Roof hook double adjustable SS
-------------	--------------------------------



1HME15DD004	Roof hook double adjustable SS medium
-------------	---------------------------------------



1HME15DD002	Roof hook double adjustable long tile
-------------	---------------------------------------



1HME15DD007	Slide hook double adjustable
-------------	------------------------------



1HME46HT004	Wood screw 8x80 TX40
-------------	----------------------




1HME10BT037	Hex bolt M10x30
1HME10MR001	Knurled nut M10



1HME15DD003	Roof hook double adjustable hybrid
-------------	------------------------------------



1HME43AL050	House profile 6,00 m alu
1HME43ZW041	House profile 6,00 m black
	Other lengths available on request

	Article code	Article description
	1HME43AL035	Profile Feather 6,00 m alu
	1HME43ZW044	Profile Feather 6,00 m black
	1HMEACPV001	Profile connector 40 mm alu
	1HMEACPV002	Profile connector 40 mm black
	1HMEACPS002	End cap for profile 40x40 grey
	1HME0ACPS001	End cap for profile 40x40 black
	1HME32KK003	Middle clamp click 30-40 mm alu
	1HME32KK004	Middle clamp click 30-40 mm black
	1HME32KK024	End clamp click 30 mm alu
	1HME32KK025	End clamp click 30 mm black
	1HME32SR085	Middle clamp basic length 60 mm alu
	1HME32SR086	Middle clamp basic length 60 mm black
	1HME32SR069	End clamp 30 mm length 60 mm alu
	1HME10BT015	Allen bolt M8x20 (panel size - 10 mm)
	1HME10MR004	Spring ball nut M8

Roof hook Optimum



Roof hook optimum

This roof hook was designed for easy and durable installation. The optimum roof hook is double adjustable and comes with a convenient profile connector. Thanks to its modified shape and optimized screw slots, the roof hook is easier to position and align. In addition, the roof hook is lighter than comparable stainless steel roof hooks making installation more ergonomic.


The Optimum roof hook is designed with only Torx screws which allows you to install it with only one tool.



Steel deck



Components

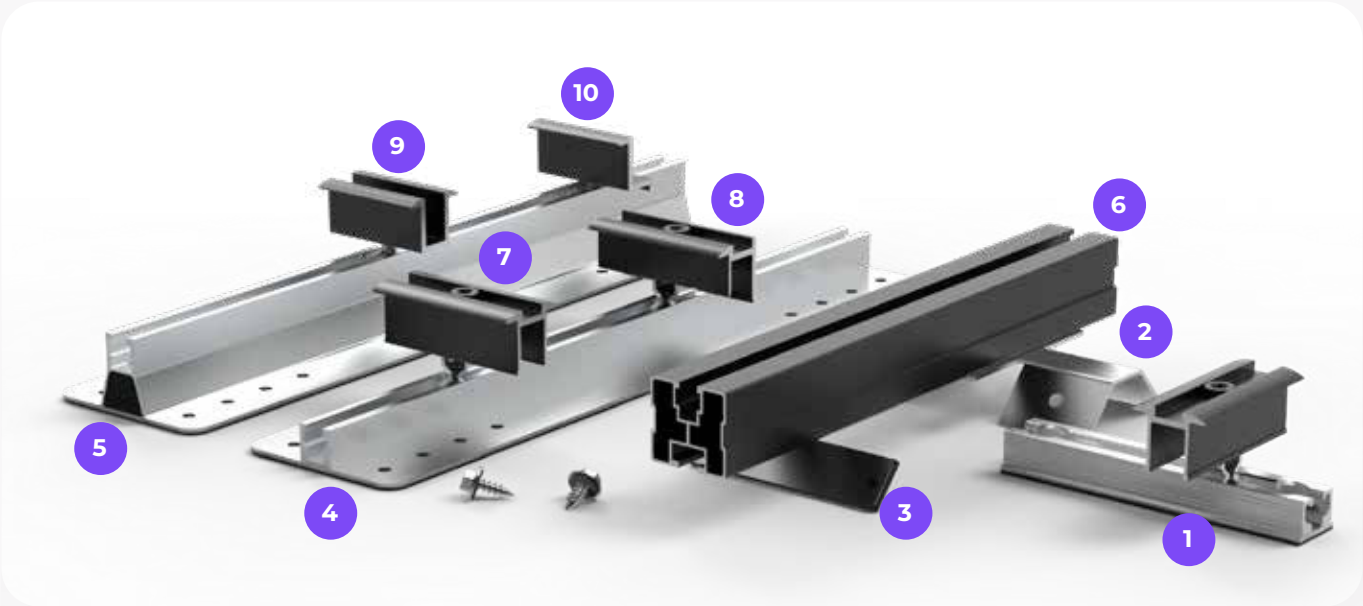

	Article code	Article description
	1HME15SD005	Steel deck plate landscape 15 cm
	1HME15SD001	Steel deck plate SS
	1HME10BT037 1HME10MR001	Hex bolt M10x30 Knurled nut M10
	1HME15SD004	Steel deck connecting plate
	1HME15SD006	Steel deck plate 40 mm raised portrait 40 cm alu
	1HME15SD008	Wood screw 8x80 TX40
	1HME46BM003	Bi-metal screws for steel deck 6,0x25
	1HME43AL050 1HME43ZW041	House profile 6,00 m alu House profile 6,00 m black Other lengths available on request
	1HME43AL035 1HME43ZW044	Profile Feather 6,00 m alu Profile Feather 6,00 m black

	Article code	Article description
	1HMEACPV001	Profile connector 40 mm alu
	1HMEACPV002	Profile connector 40 mm black
	1HMEACPS002	End cap for profile 40x40 grey
	1HME0ACPS001	End cap for profile 40x40 black
	1HME32KK003	Middle clamp click 30-40 mm alu
	1HME32KK004	Middle clamp click 30-40 mm black
	1HME32KK024	End clamp click 30 mm alu
	1HME32KK025	End clamp click 30 mm black
	1HME32SR085	Middle clamp basic length 60 mm alu
	1HME32SR086	Middle clamp basic length 60 mm black
	1HME32SR069	End clamp 30 mm length 60 mm alu
	1HME10BT015	Allen bolt M8x20 (panel size - 10 mm)
	1HME10MR004	Spring ball nut M8



Steel deck plate 40mm raised portrait 40cm alu

We developed an elevated version of the standard steel deck plate. This elevated version has several additional benefits:

- Additional space for optimizers;
- More space for cables and the cable tray;
- Optimal ventilation of the solar panels, resulting in higher efficiency.






House profile

The universal profile within the HOME range.

- The house profile is suitable for various pitched roof types.
- The profile works with any roof hook, triangle and clamp. One profile is all it takes for various applications.
- The alu and black finish guarantee a sleek finish.

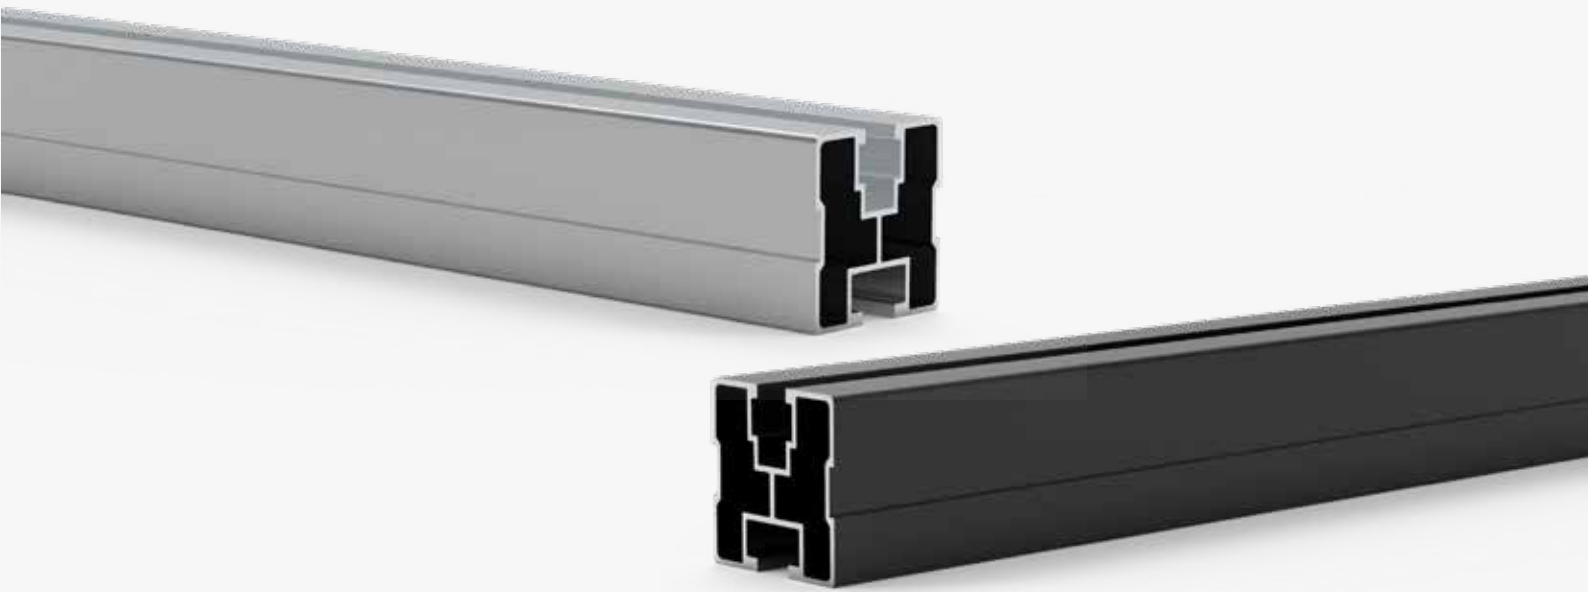


Profile Feather

Discover the Feather profile, a rugged lightweight in the HOME range.


- Feather's innovative design gives you more stability and support on the roof.
- The custom profile length and light weight facilitate installation on the roof.
- As much as 30% less CO2 is emitted during production. Feather is doing its part in reducing our carbon footprint.
- Feather has been extensively tested. This ensures a safe product and installation.



Corrugated roof

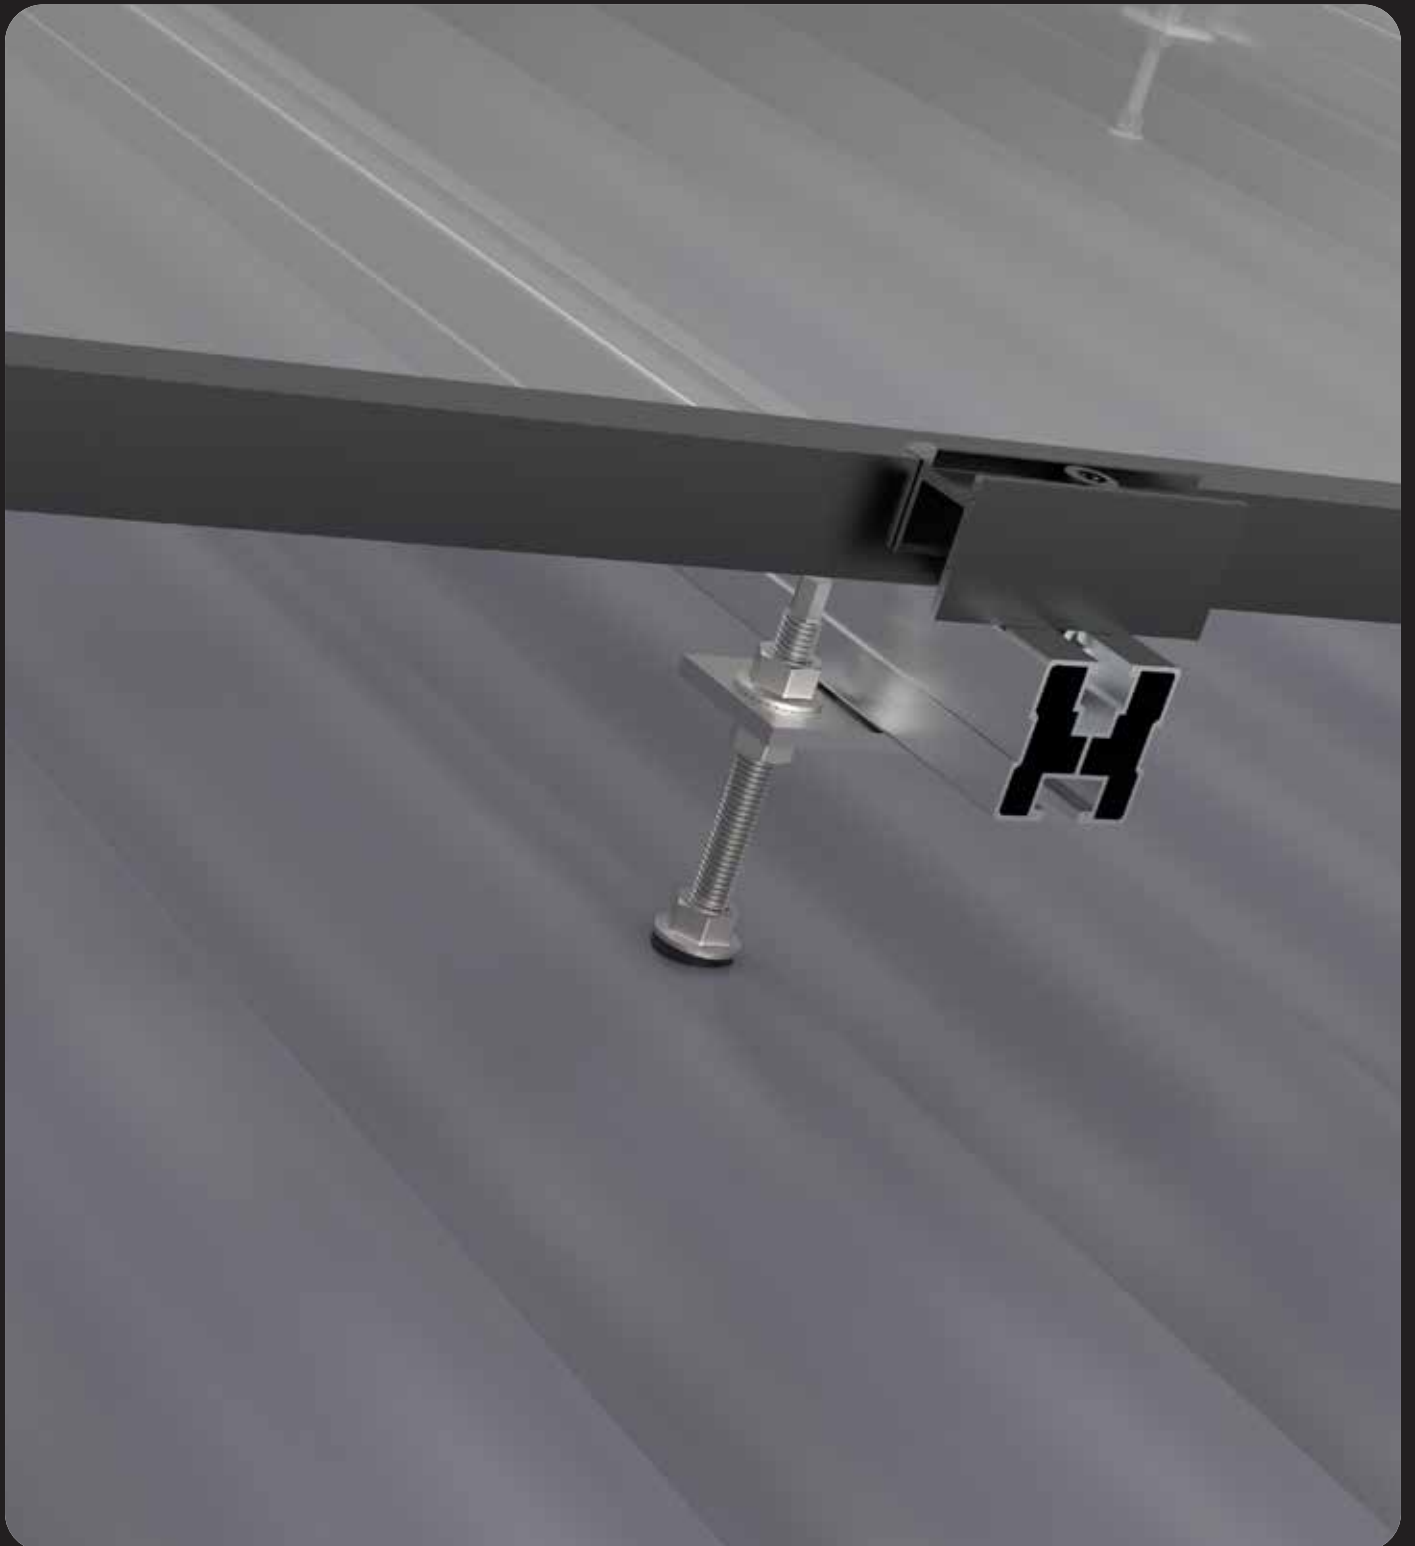

Components

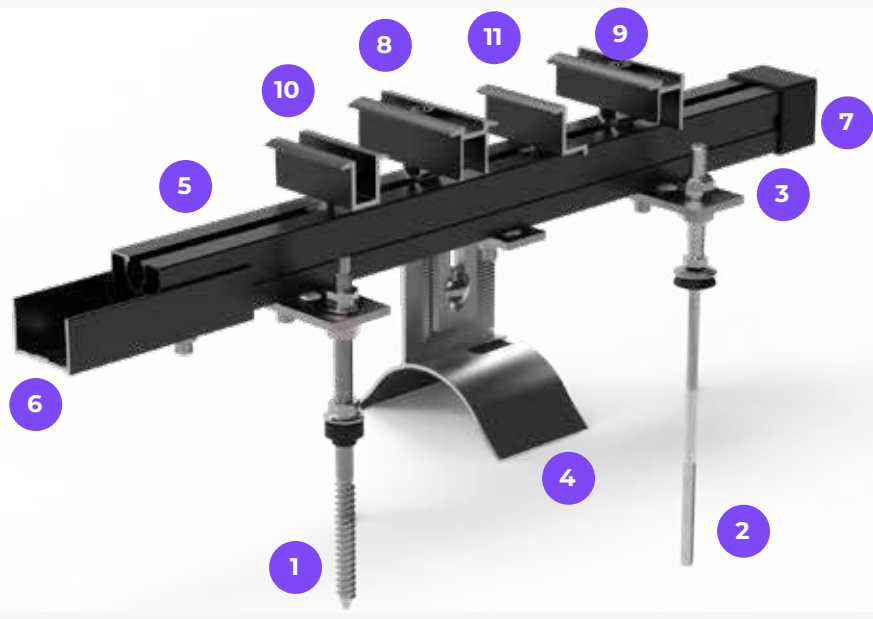

Article code	Article description
1HME15SS004	Hanger screw with mounting plate M10x200



1HME15SS026	Hanger bolt for metal construction 8x200/70 without mounting plate
-------------	--



1HMEACMP003	Fastconnector
-------------	---------------



1HMEACMP002	Mounting plate 82x40x5 mm
-------------	---------------------------



1INL15DV007	Roof hook corrugated sheet
-------------	----------------------------



1HME15AC003	L-piece roof hook slate single adjustable
-------------	---



1HME10BT037	Hex bolt M10x30
1HME10MR001	Knurled nut M10



1HME43AL050	House profile 6,00 m alu
1HME43ZW041	House profile 6,00 m black
	Other lengths available on request



1HME43AL035	Profile Feather 6,00 m alu
1HME43ZW044	Profile Feather 6,00 m black

	Article code	Article description
6 	1HMEACPV001	Profile connector 40 mm alu
	1HMEACPV002	Profile connector 40 mm black
7 	1HMEACPS002	End cap for profile 40x40 grey
	1HME0ACPS001	End cap for profile 40x40 black
8 	1HME32KK003	Middle clamp click 30-40 mm alu
	1HME32KK004	Middle clamp click 30-40 mm black
9 	1HME32KK024	End clamp click 30 mm alu
	1HME32KK025	End clamp click 30 mm black
10 	1HME32SR085	Middle clamp basic length 60 mm alu
	1HME32SR086	Middle clamp basic length 60 mm black
11 	1HME32SR069	End clamp 30 mm length 60 mm alu
	1HME10BT015	Allen bolt M8x20 (panel size - 10 mm)
	1HME10MR004	Spring ball nut M8



Cross connector

Thanks to the cross connector, you can easily create double-layer mounting structures that also allow you to place panels in landscape orientation. The cross connector makes the connection between the vertical and horizontal rails. This way, the cross connector makes it possible to place profiles horizontally on the roof and use the optimal roof area. The cross connector is suitable for different roof types.



Hanger screw and bolt

We offer different types and sizes to match the substructure in steel or wood.


- Different thicknesses for more grip in the substructure
- Rubber seal for waterproofing
- Easy alignment of profiles due to the long thread



Slate roof



Components

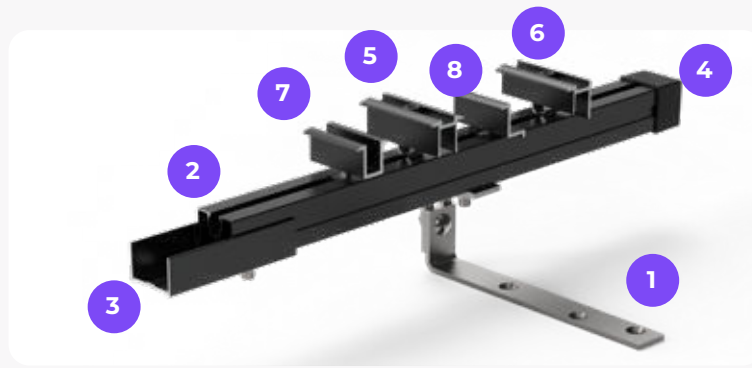

1



1HME15DE002

Roof hook single adjustable slate SS

2



1HME46HT001

Wood screw 6x70 TX25

3



1HME10BT037
1HME10MR001

Hex bolt M10x30
Knurled nut M10

2



1HME43AL050
1HME43ZW041

House profile 6,00 m alu
House profile 6,00 m black
Other lengths available on request

3



1HME43AL035
1HME43ZW044

Profile Feather 6,00 m alu
Profile Feather 6,00 m black

3



1HMEACPV001
1HMEACPV002

Profile connector 40 mm alu
Profile connector 40 mm black

4



1HMEACPS002
1HME0ACPS001

End cap for profile 40x40 grey
End cap for profile 40x40 black

5



1HME32KK003
1HME32KK004

Middle clamp click 30-40 mm alu
Middle clamp click 30-40 mm black

6



1HME32KK024
1HME32KK025

End clamp click 30 mm alu
End clamp click 30 mm black

7



1HME32SR085
1HME32SR086

Middle clamp basic length 60 mm alu
Middle clamp basic length 60 mm black

8



1HME32SR069

End clamp 30 mm length 60 mm alu

8




1HME10BT015
1HME10MR004

Allen bolt M8x20 (panel size - 10 mm)
Spring ball nut M8

Zinc roof



Components

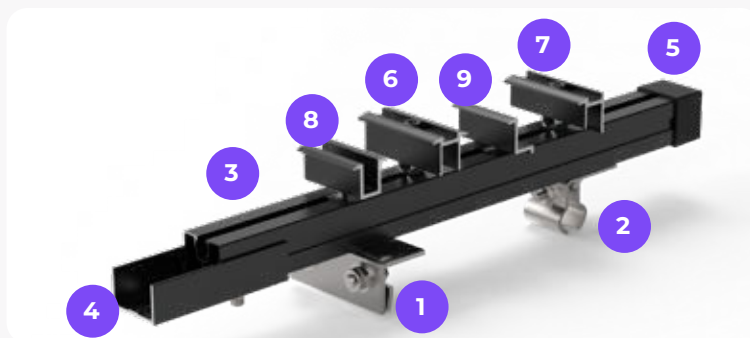




	Article code	Article description
	1HME15DV006	Zink roof clamp standing seam
	1HME15DV003	Zink roof clamp round
	1HME10BT037 1HME10MR001	Hex bolt M10x30 Knurled nut M10
	1HME43AL050 1HME43ZW041	House profile 6,00 m alu House profile 6,00 m black Other lengths available on request
	1HME43AL035 1HME43ZW044	Profile Feather 6,00 m alu Profile Feather 6,00 m black
	1HMEACPV001 1HMEACPV002	Profile connector 40 mm alu Profile connector 40 mm black
	1HMEACPS002 1HME0ACPS001	End cap for profile 40x40 grey End cap for profile 40x40 black
	1HME32KK003 1HME32KK004	Middle clamp click 30-40 mm alu Middle clamp click 30-40 mm black
	1HME32KK024 1HME32KK025	End clamp click 30 mm alu End clamp click 30 mm black
	1HME32SR085 1HME32SR086	Middle clamp basic length 60 mm alu Middle clamp basic length 60 mm black
	1HME32SR069	End clamp 30 mm length 60 mm alu
	1HME10BT015 1HME10MR004	Allen bolt M8x20 (panel size - 10 mm) Spring ball nut M8

Bitumen/EPDM roof



Components

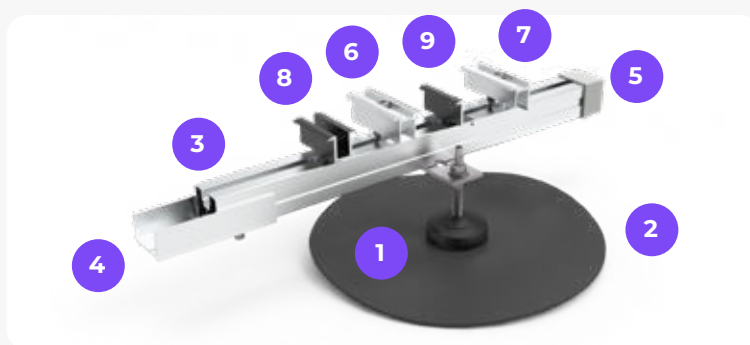

	Article code	Article description
	1HMECOMP008	Base set
	1HFR12ZZ002	Sealing sleeve EPDM
	1HMECOMP001	Sealing sleeve bitumen
	1HMEACMP003	Fastconnector
	1HMEACMP002	Mounting plate 82x40x5 mm
	1HME10BT037 1HME10MR001	Hex bolt M10x30 Knurled nut M10
	1HME43AL050 1HME43ZW041	House profile 6,00 m alu House profile 6,00 m black Other lengths available on request
	1HME43AL035 1HME43ZW044	Profile Feather 6,00 m alu Profile Feather 6,00 m black
	1HMEACPV001 1HMEACPV002	Profile connector 40 mm alu Profile connector 40 mm black
	1HMEACPS002 1HME0ACPS001	End cap for profile 40x40 grey End cap for profile 40x40 black
	1HME32KK003 1HME32KK004	Middle clamp click 30-40 mm alu Middle clamp click 30-40 mm black
	1HME32KK024 1HME32KK025	End clamp click 30 mm alu End clamp click 30 mm black

9

**Article code****Article description**

1HME32SR085
1HME32SR086

Middle clamp basic length 60 mm alu
Middle clamp basic length 60 mm black

10



1HME32SR069

End clamp 30 mm length 60 mm alu



1HME10BT015
1HME10MR004

Allen bolt M8x20 (panel size - 10 mm)
Spring ball nut M8


Mounting anchor



Fast & Solid Installation

Our mounting anchors give your solar panels a rock-solid, long-lasting fix — without putting extra stress on your roof. They're the go-to solution for tricky roof setups: uneven surfaces, sloped roofs, or situations where ballasting just isn't an option.

- 100% watertight thanks to a reliable sealing layer
- Built to handle high pressure and strong pull forces
- Perfect for both flat and sloped bitumen or EPDM roofs

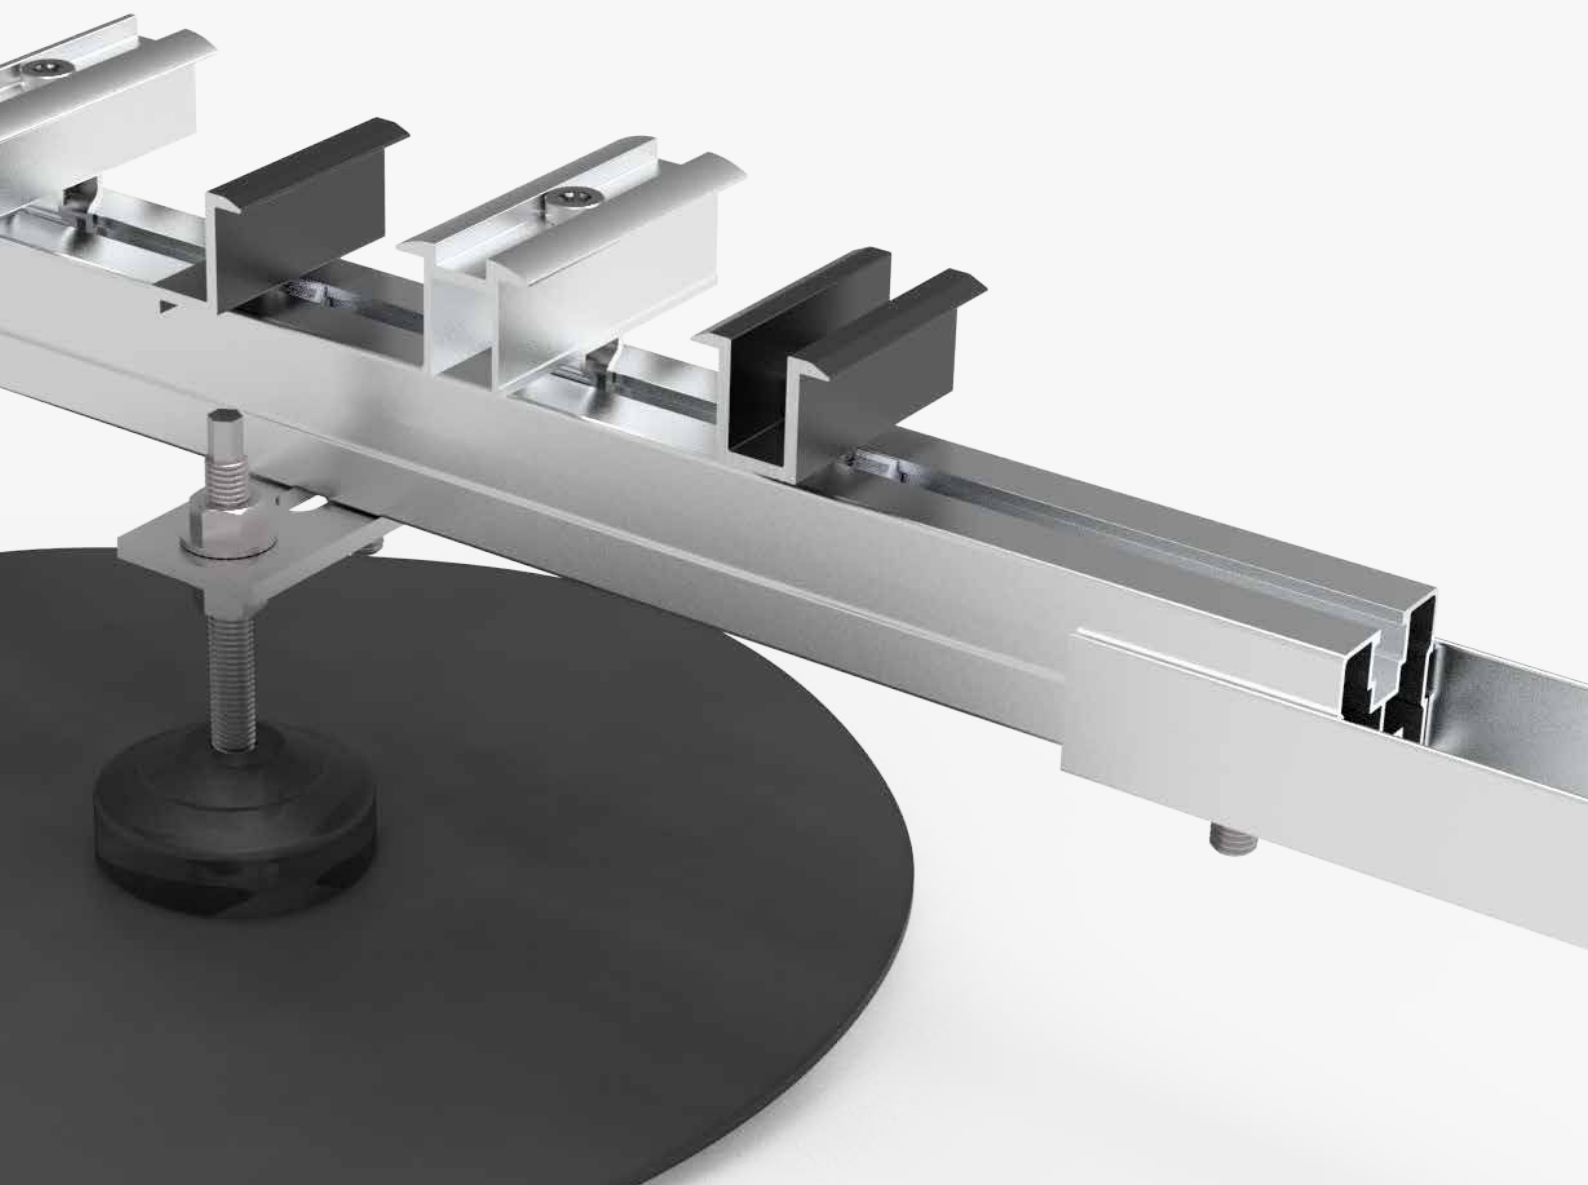

Tested & certified

Developed and certified with leading institutins

Our products are developed in close collaboration with Hasselt University and engineered at TU Delft in our state-of-the-art R&D center. This ensures that every component is designed with precision, innovation, and reliability in mind.



Engineered for durability & performance

All ProMount mounting materials comply with European wind and snow load standards, giving you peace of mind in every installation. Our robust design and careful material selection allow your solar projects to withstand even the most demanding conditions.





Long-lasting finish & quality

We stand behind our products with a 25-year guarantee on all mounting materials. In addition, black anodized aluminum components come with a 10-year color retention guarantee, so your installation stays both functional and visually striking for years to come.

Product sheets




Roof hook Optimum

Article code	1HME15DD009
Material	ZAM coated steel, aluminium
Color	steel
Weight	663 gr
Application	tilled roof
Packaging	30 pcs/carton, 1.200 pcs/pallet

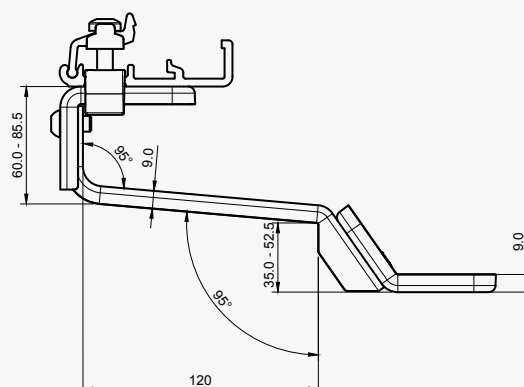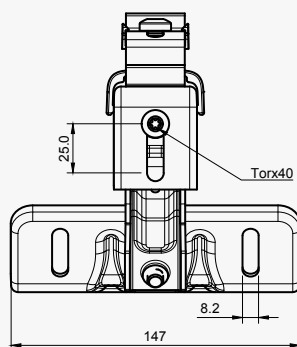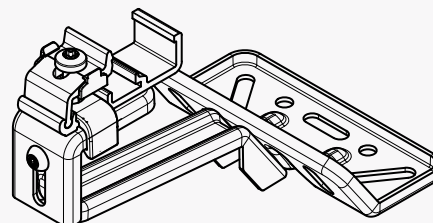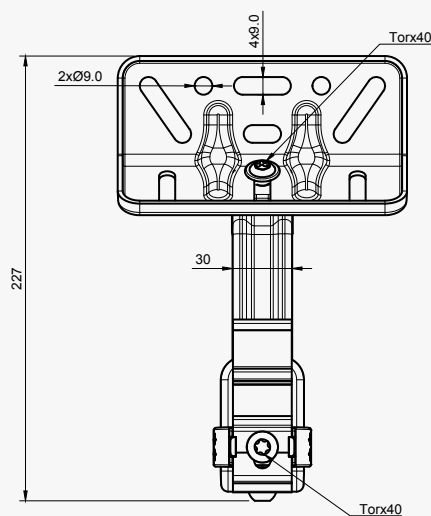




Roof hook double adjustable

Article code	1HME15DD001
Material	SS304
Color	SS
Weight	790 gr
Application	tilled roof
Packaging	30 pcs/carton, 1.200 pcs/pallet

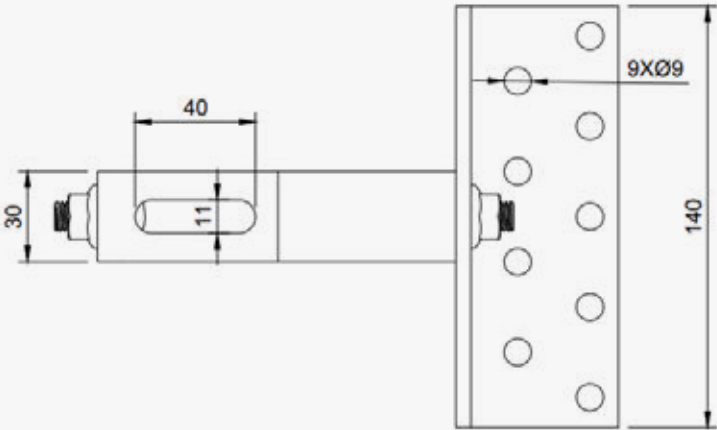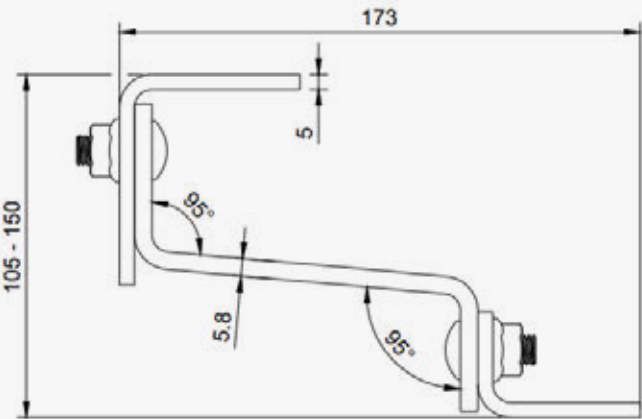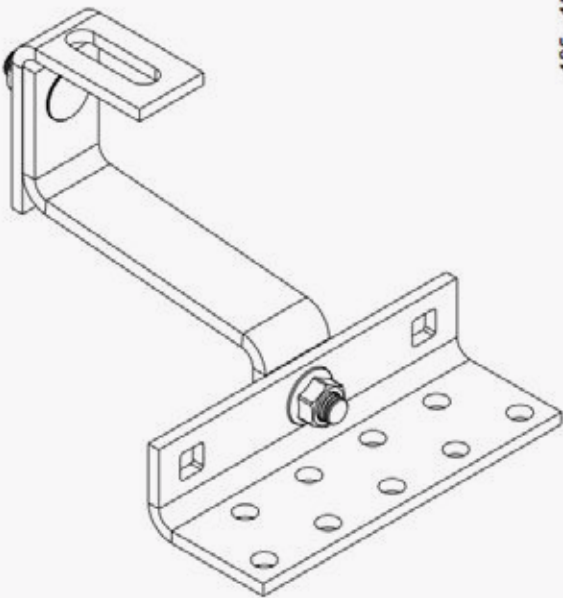



Roof hook double adjustable medium

Article code	1HME15DD004
Material	SS304
Color	SS
Weight	840 gr
Application	tilted roof
Packaging	30 pcs/carton, 1.200 pcs/pallet

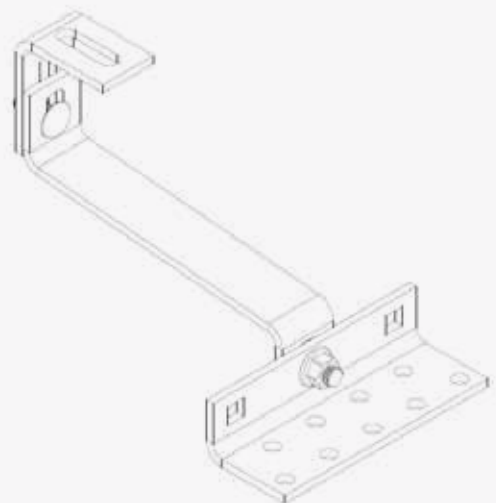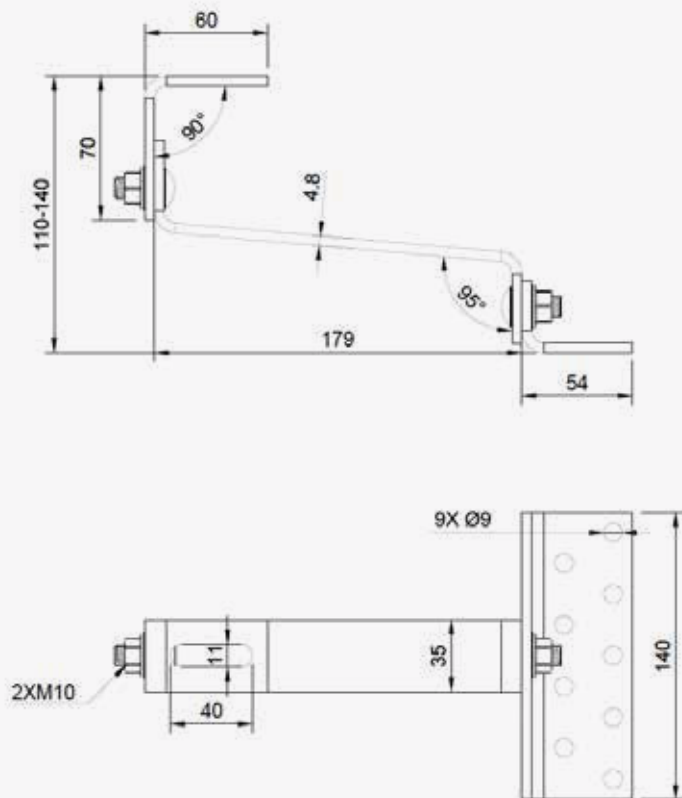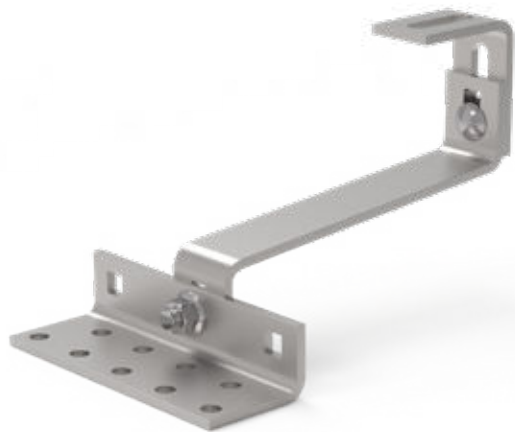


Roof hook double adjustable long tile

Article code	1HME15DD002
Material	SS304
Color	SS
Weight	880 gr
Application	tiled roof
Packaging	30 pcs/carton, 1.200 pcs/pallet

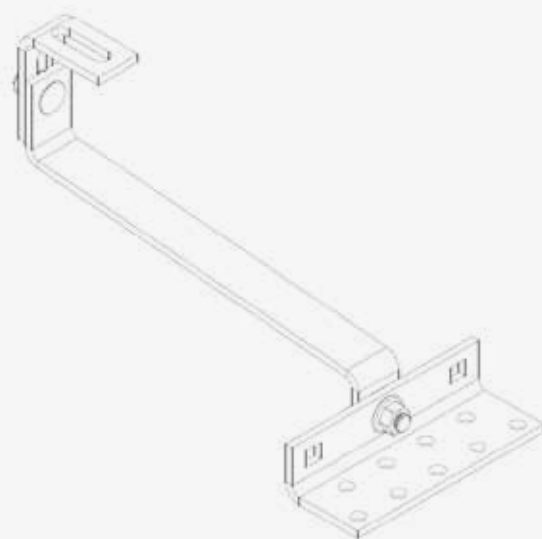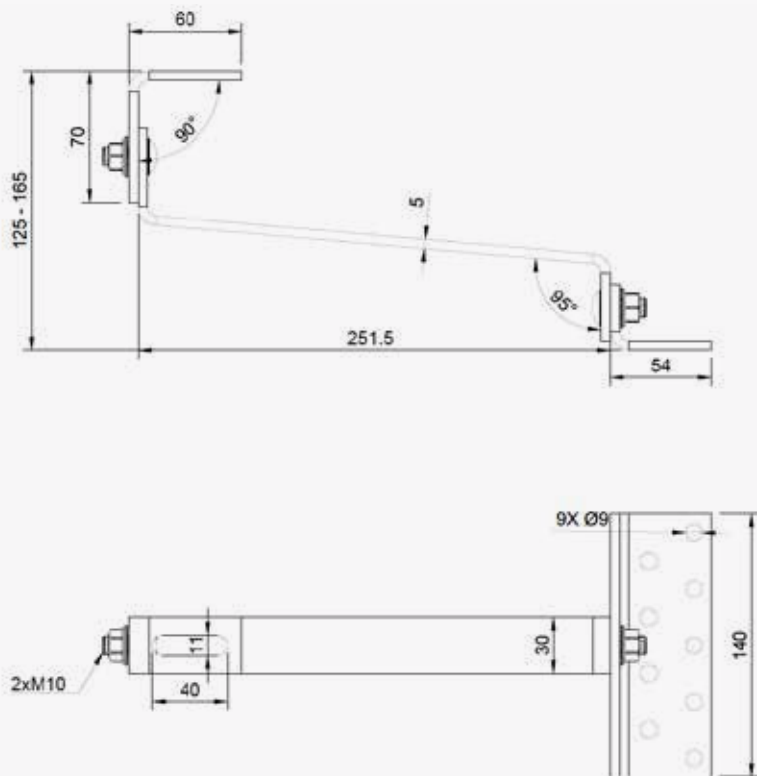


Roof hook double adjustable slide

Article code	1HME15DD007
Material	ALU6063T5 + SSA2
Color	alu
Weight	250 gr
Application	tiled roof
Packaging	50 pcs/carton, 1.200 pcs/pallet

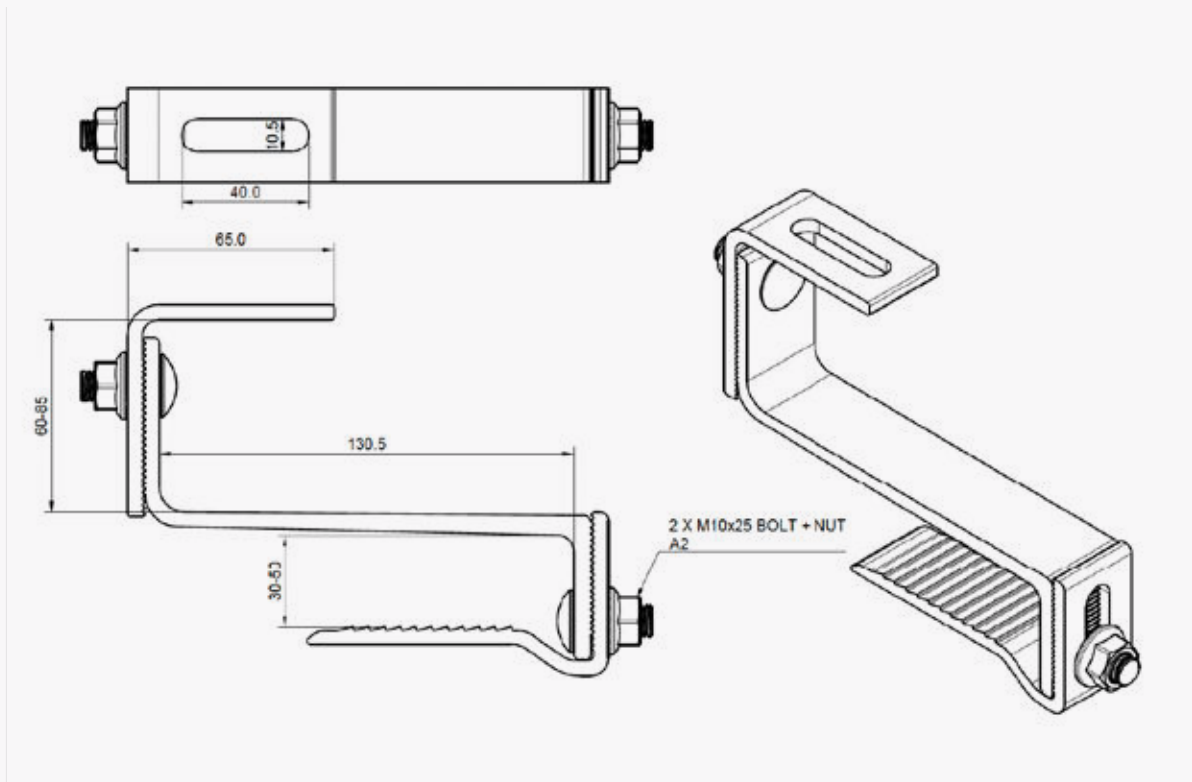



Roof hook double adjustable hybrid

Article code	1HME15DD003
Material	ALU6063T5 + SSA2
Color	alu
Weight	330 gr
Application	tilled roof
Packaging	30 pcs/carton, 1.200 pcs/pallet

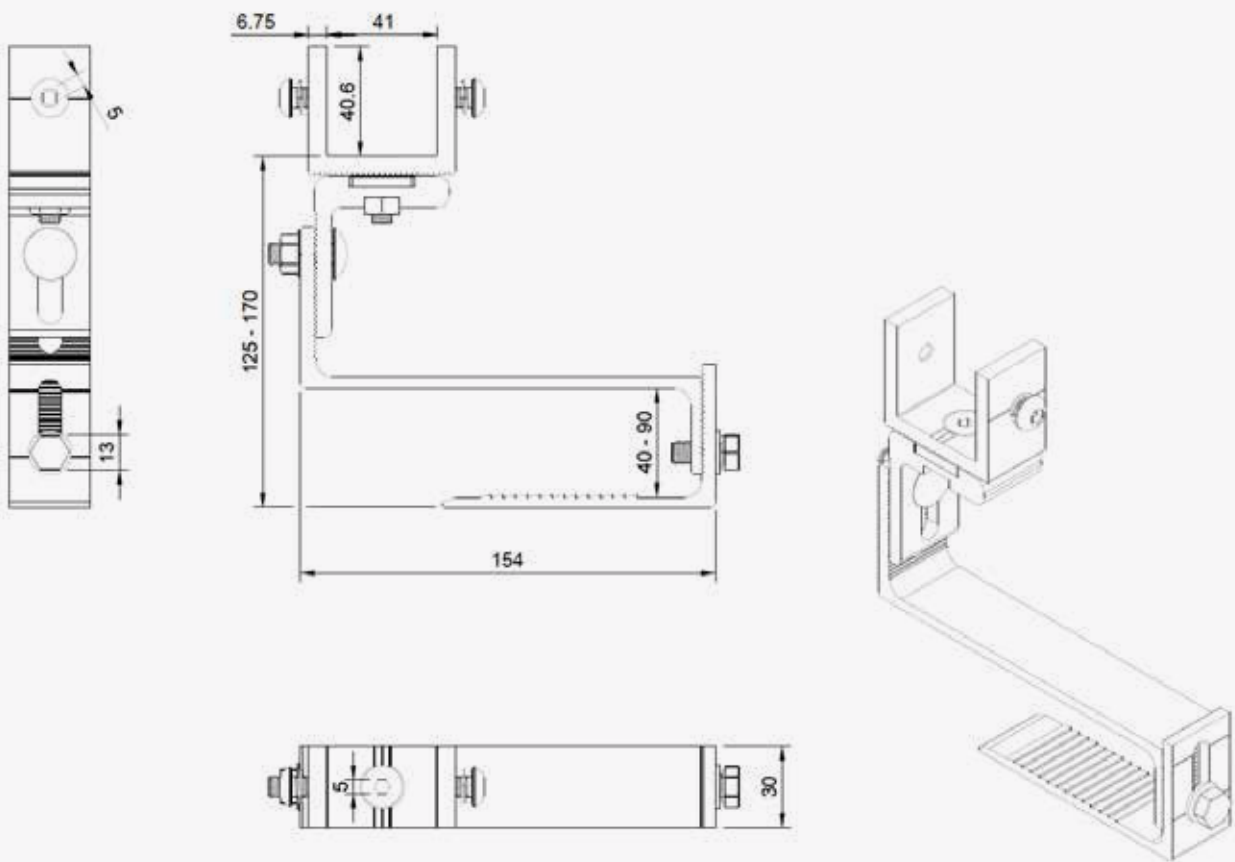




Steel deck plate landscape 15 cm

Article code	1HME15SD005
Material	ALU6063T5 + EPDM
Color	alu
Weight	90 gr
Application	steel deck roof
Packaging	35 pcs/carton, 1.260pcs/pallet

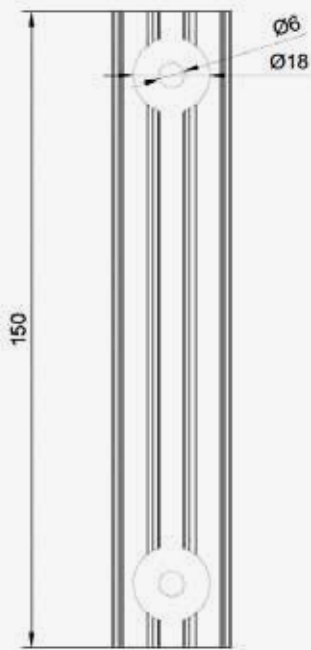



Steel deck plate SS

Article code	1HME15SD001
Material	SS304
Color	SS
Weight	190 gr
Application	steel deck roof
Packaging	25 pcs/pack, 300 pcs/carton

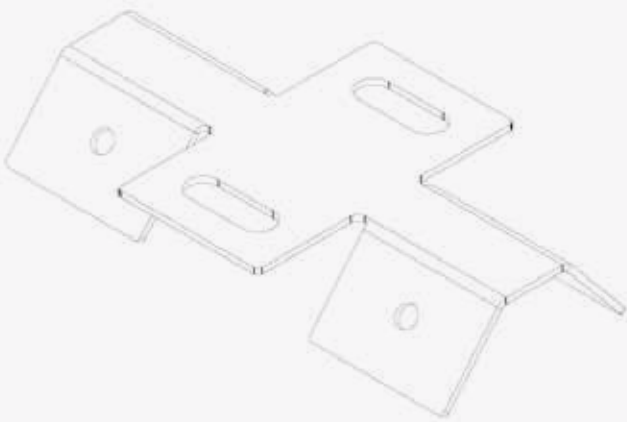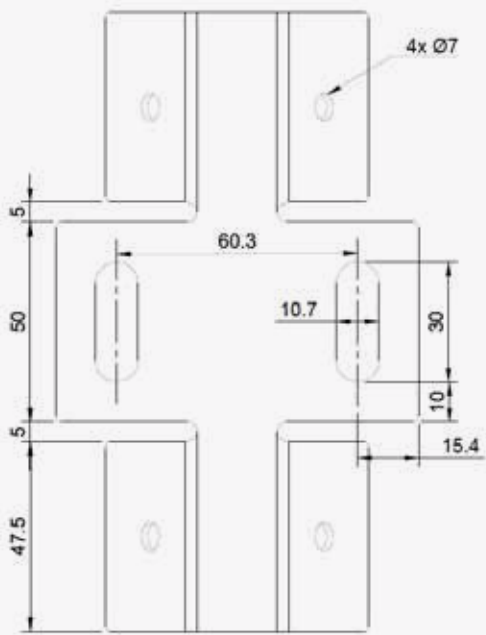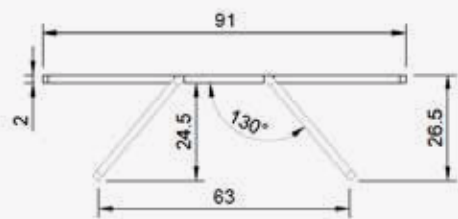


Steel deck connecting plate

Article code	1HME15SD004
Material	SS304 + EPDM
Color	SS
Weight	30 gr
Application	steel deck roof
Packaging	25 pcs/pack, 300 pcs/carton

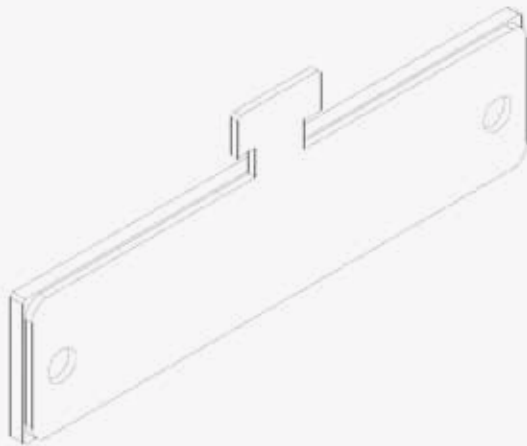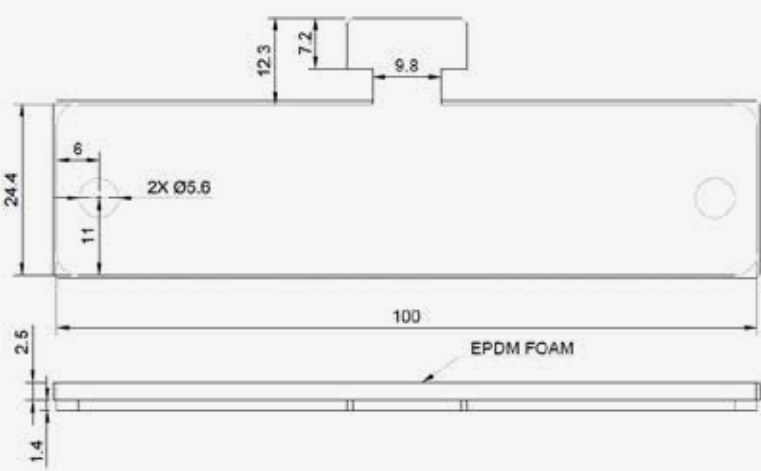


Cross connector

Article code	1HMEACKV001
Material	ALU6063T5
Color	alu
Weight	120 gr
Application	tilled roof, steel deck roof, corrugated roof, slate roof, zinc roof

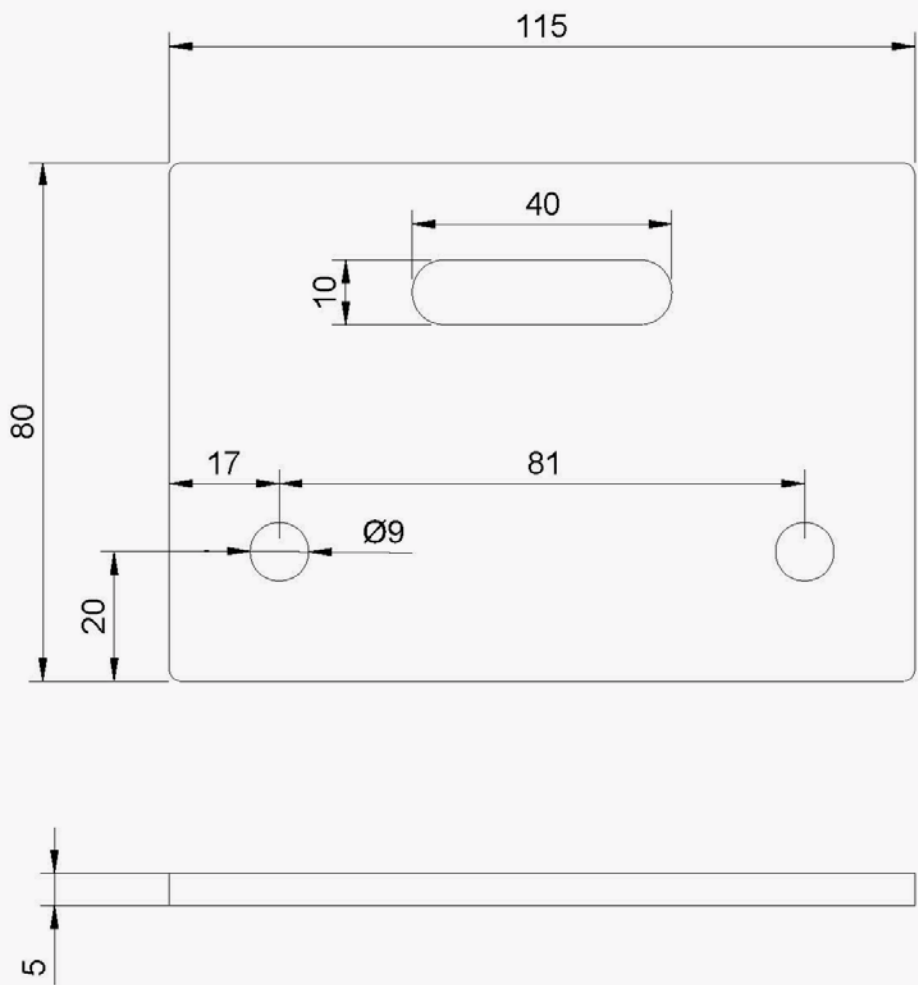


Steel deck plate portrait 40 cm

Article code	1HME15SD006
Material	ALU6063T5 + EPDM
Color	alu
Weight	410 gr
Application	steel deck roof
Packaging	35 pcs/carton, 1.260 pcs/pallet

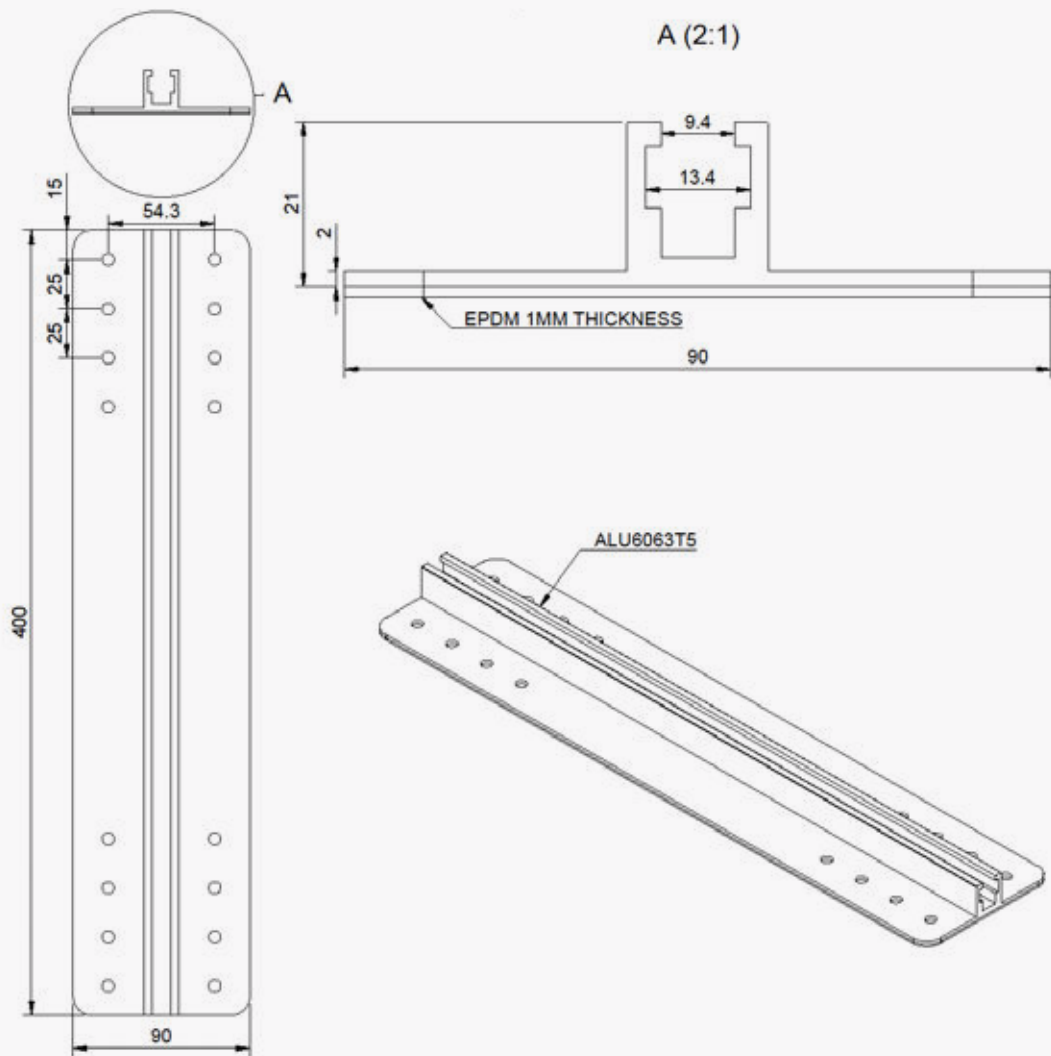



Steel deck plate 40 mm raised portrait 40 cm

Article code	1HME15SD008
Material	ALU6063T5 + EPDM
Color	alu
Weight	480 gr
Application	steel deck roof
Packaging	35 pcs/carton, 1.260 pcs/pallet

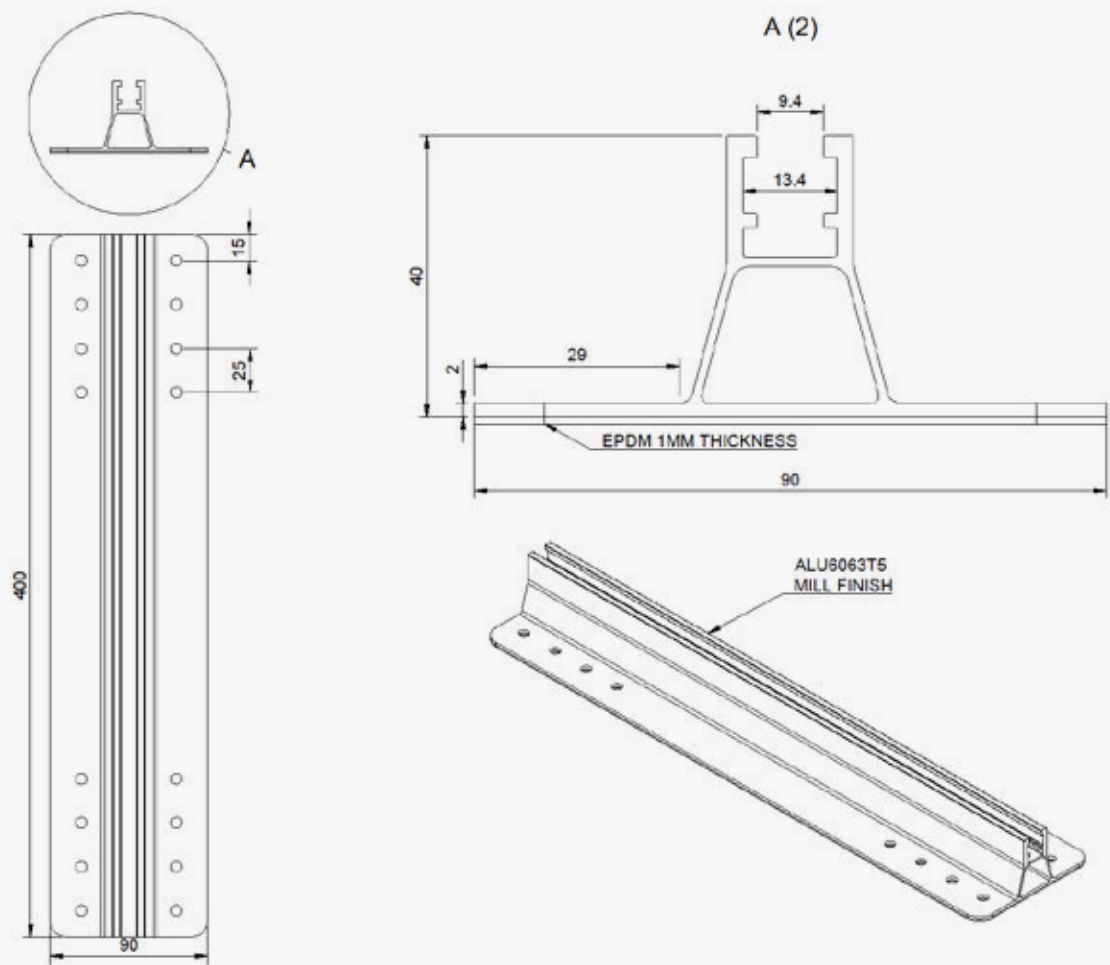

Hanger screw with mounting plate


Article code	1HME15SS004 (M10x200)
Material	SS304
Color	SS
Weight	220 gr
Application	corrugated roof
Packaging	100 pcs/carton, 1.200 pcs/pallet

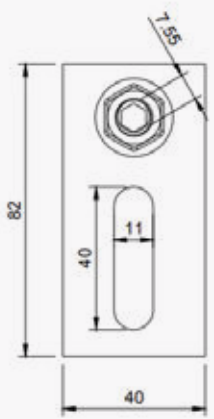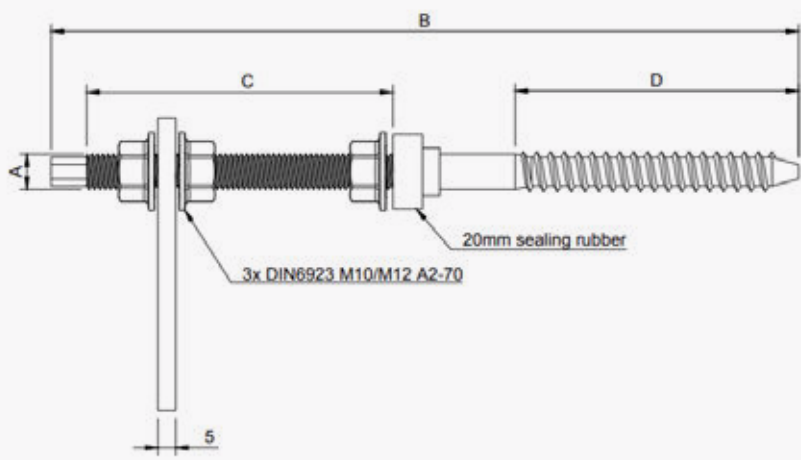

	Alu	A (in mm)	B (in mm)	C (in mm)	D (in mm)	kg
hanger screw M10x200	1HME15SS004	10	200	85	67	0,220
hanger screw M10x250	1HME15SS005	10	250	85	67	0,250
hanger screw M10x300	1HME15SS007	10	300	150	67	0,275

Hanger bolt for metal construction without mounting plate




Article code	1HME15SS026 (8x200/70)
Material	SS304
Color	SS
Weight	120 gr
Application	corrugated roof, steel beams
Packaging	100 pcs/carton, 1.200 pcs/pallet

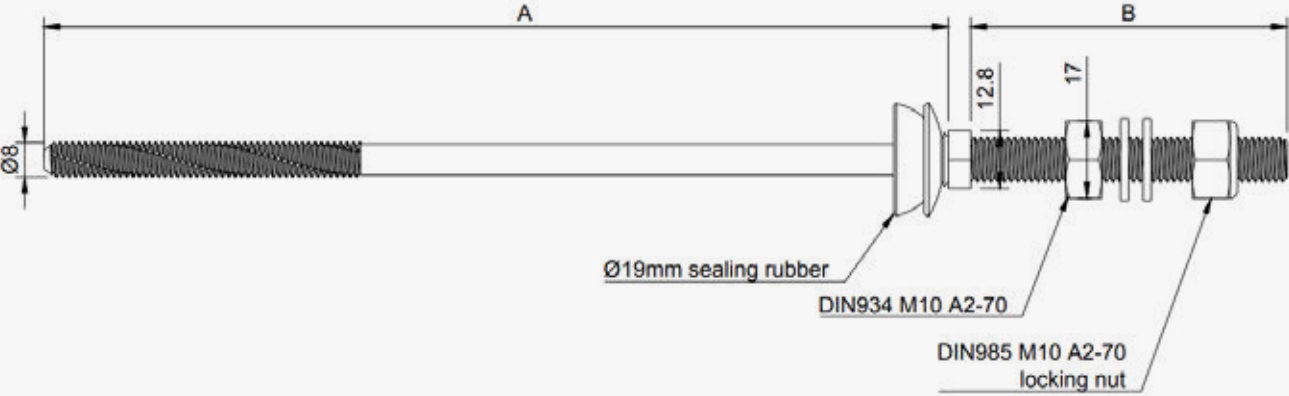

	Alu	A (in mm)	B (in mm)	kg
hanger bolt 8,00x200/70	1HME15SS026	200	70	0,12
hanger bolt 8,00x150/70	1HME15SS002	150	70	0,12




Fastconnector

Article code	1HMEACMP003
Material	Q235 ZAM
Color	steel
Weight	190 gr
Packaging	2.880 pcs/pallet

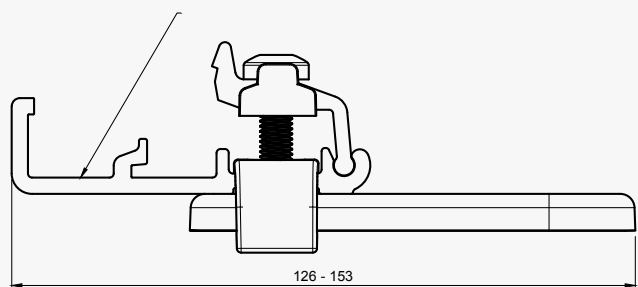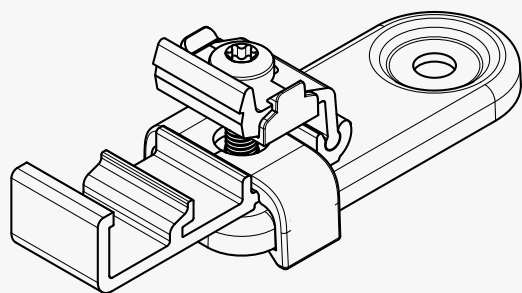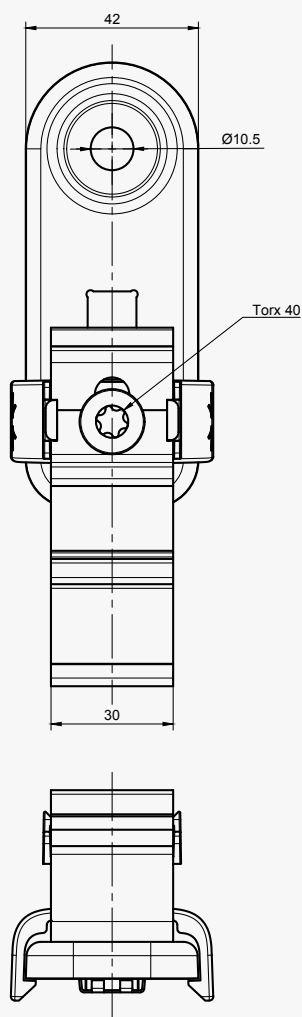

Mounting plate 82x40x5 mm





Article code	1HMEACMP002
Material	SS304
Color	SS
Weight	1000 gr
Packaging	25 pcs/carton, 2.000 pcs/pallet

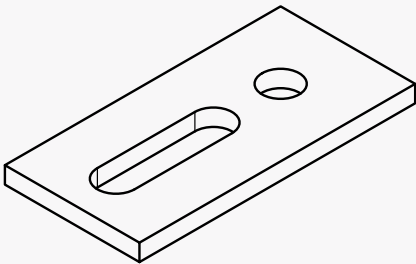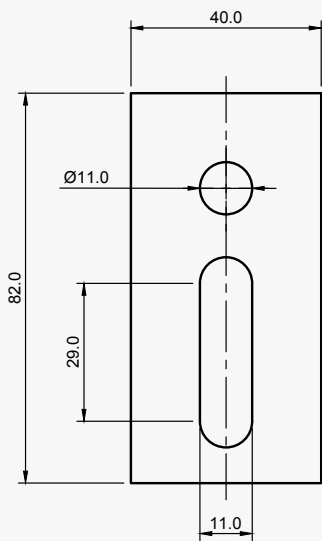

Alu	A (in mm)	B (in mm)	B (in mm)	kg
1HMEACMP001	110	40	5	0,14
1HMEACMP002	82	40	5	0,10






Roof hook corrugated sheet

Article code	11NL15DV007
Material	ALU6063 + EPDM
Color	alu
Weight	130 gr
Application	corrugated roof
Packaging	100 pcs/carton, 1.800 pcs/pallet

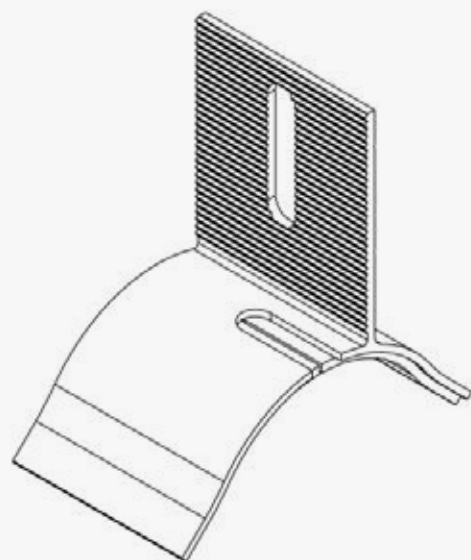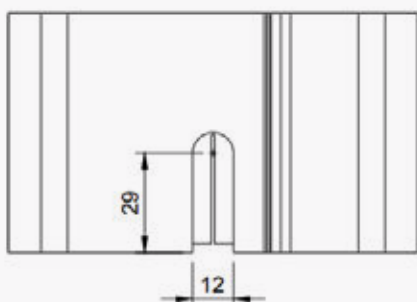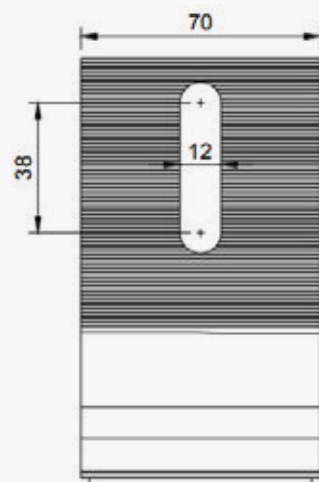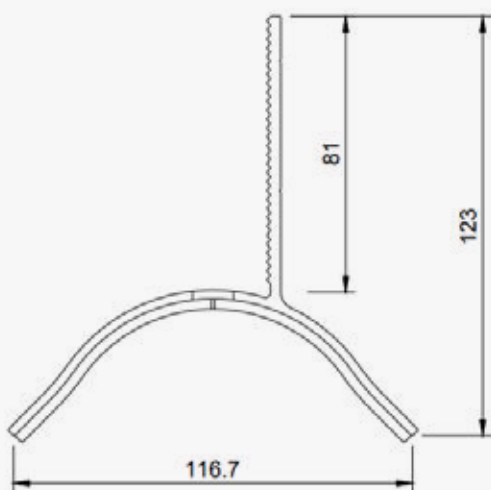

L-piece roof hook slate single adjustable





Article code	1HME15AC003
Material	SS304
Color	SS
Weight	110 gr
Application	corrugated roof
Packaging	bulk

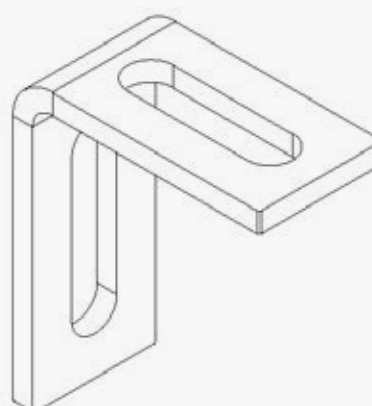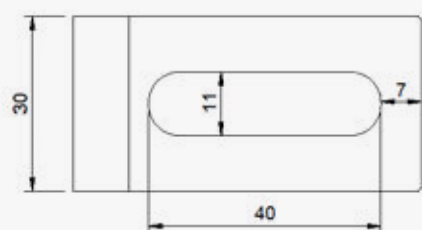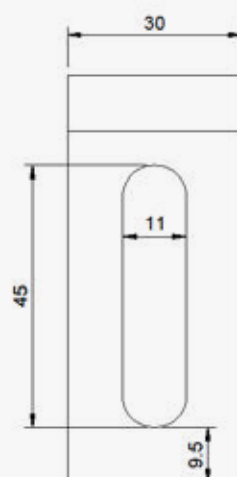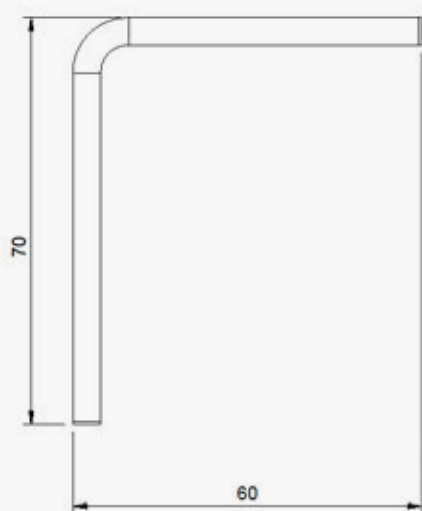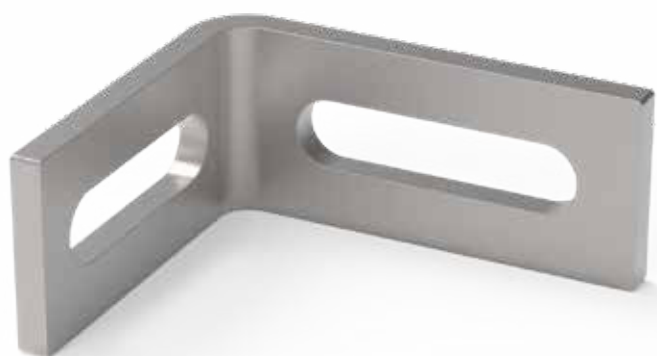

DATASHEET





Roof hook single adjustable slate SS

Article code	1HME15DE002
Material	SS304
Color	SS
Weight	410 gr
Application	slate roof
Packaging	30 pcs/carton, 1.200 pcs/pallet

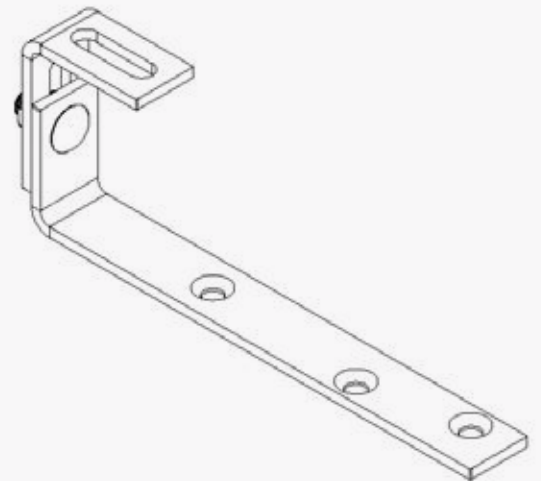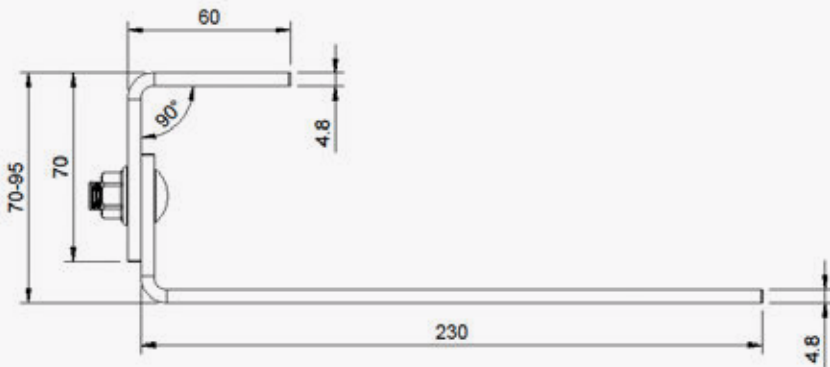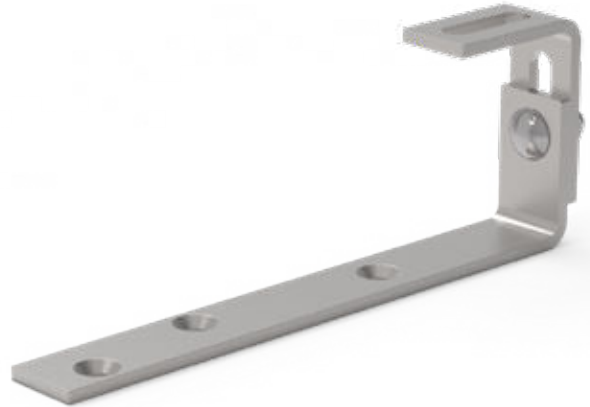





Zink roof clamp standing seam

Article code	1HME15DV006
Material	SS304
Color	SS
Weight	360 gr
Application	zinc roof
Packaging	50 pcs/carton, 6.400 pcs/pallet

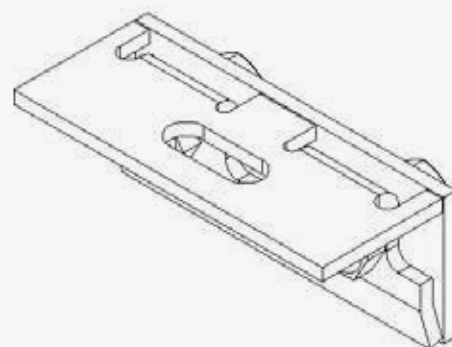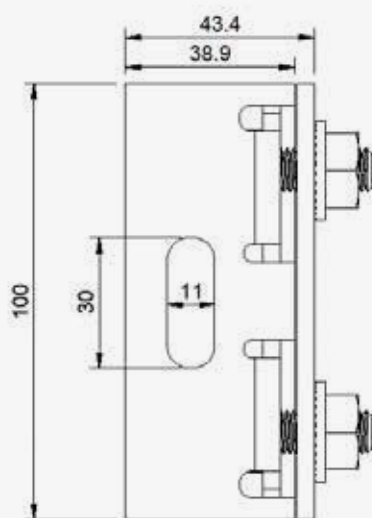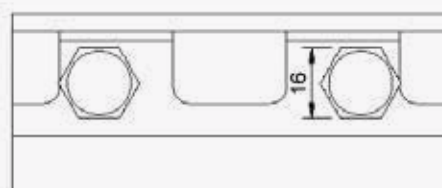


Zink roof clamp round

Article code	1HME15DV003
Material	SS304
Color	SS
Weight	140 gr
Application	zinc roof
Packaging	50 pcs/carton, 6.400 pcs/pallet

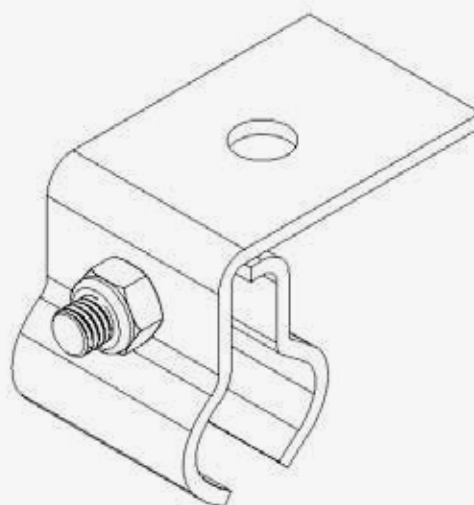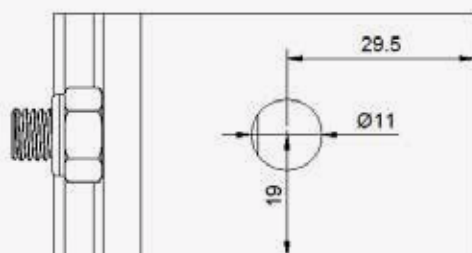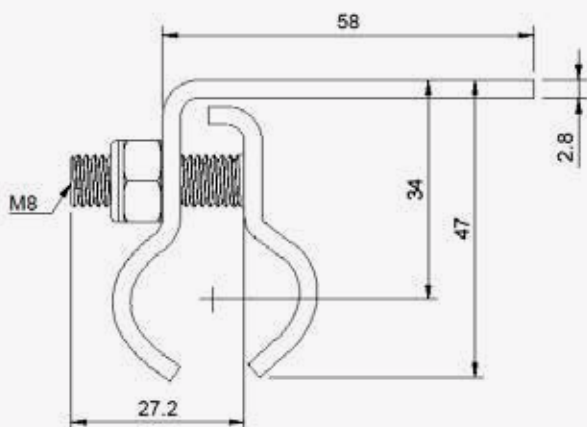

Mounting anchor base set


Article code	1HMECOMP008
Material	PA6+GF30, EVA, SS304
Color	black, SS
Weight	250 gr
Packaging	per piece

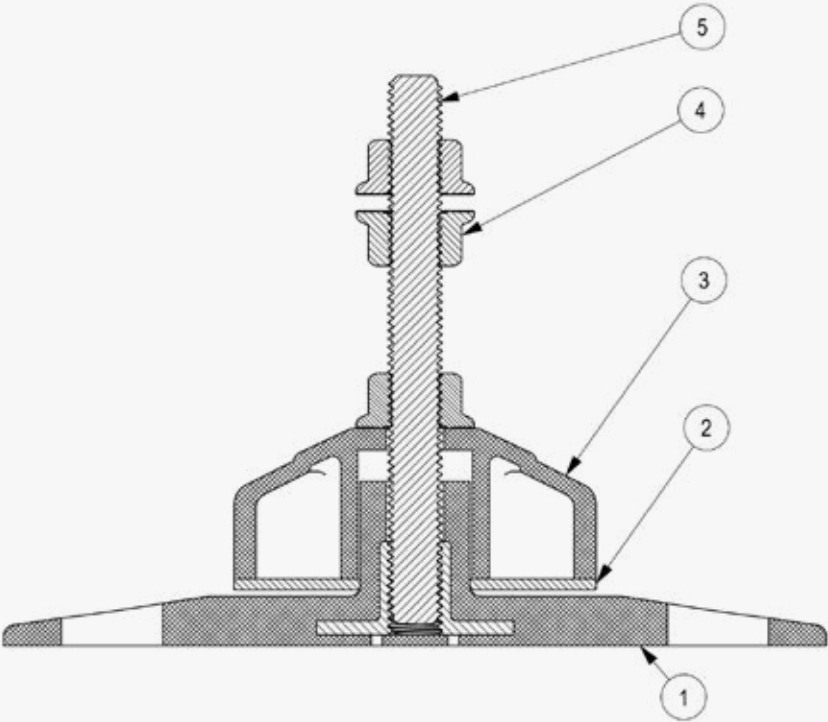

5	M10-1-5-LONG-BOLT	1
4	CARTLE-NUT-M10-	3
3	102239-102618-PLASTIC-CAP	1
2	102239-102618-EVA	1


Mounting anchor sealing sleeve EPDM

Article code	1HFRI2ZZ002
Material	EPDM
Color	black
Weight	200 gr
Application	EPDM roofs (flat & pitched)
Packaging	20 pcs/carton

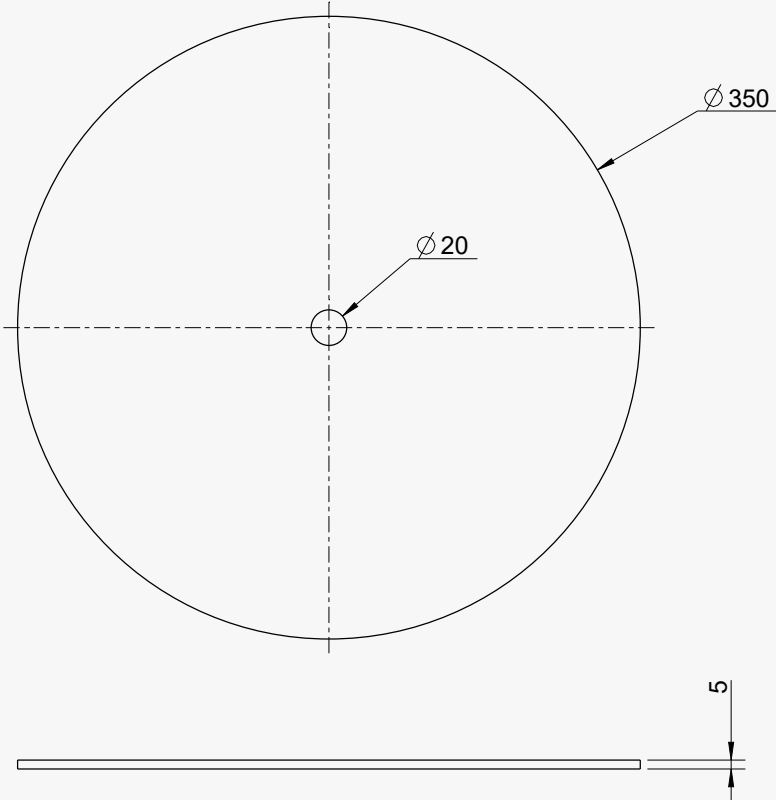


Mounting anchor sealing sleeve bitumen

Article code	1HMECOMP001
Material	bitumen
Color	zwart
Weight	698 gr
Application	bitumen roofs (flat & pitched)
Packaging	20 pcs/carton

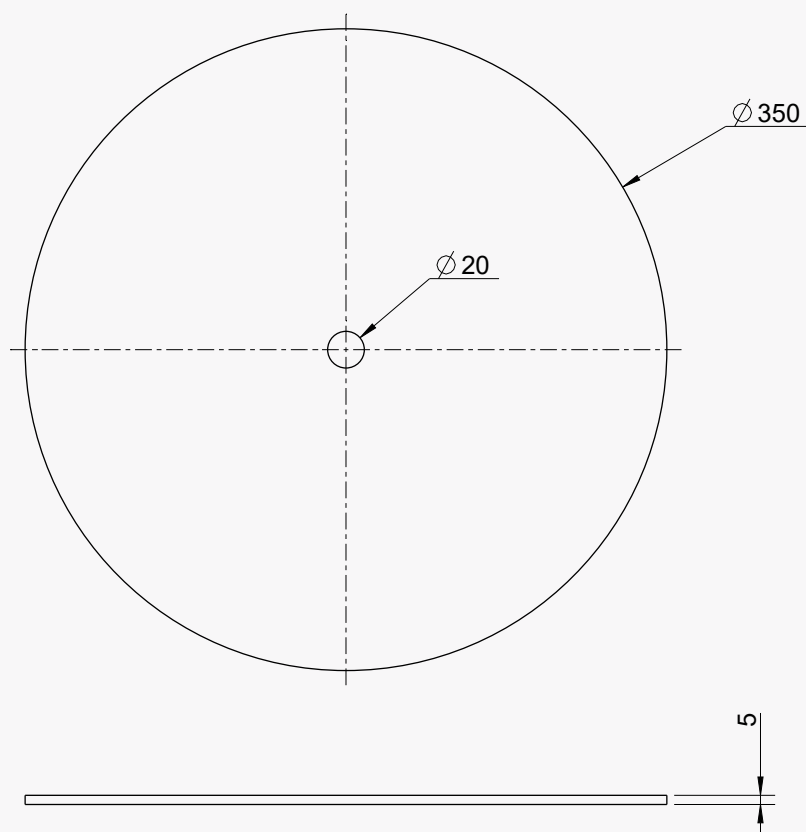

House profile

Article code	1HME43AL050 (6,00 m alu) 1HME43ZW041 (6,00 m black)
Material	ALU6063T5
Color	alu / black
Weight	717 gr / m
Application	tiled roof, steel deck roof, corrugated roof, slate roof, zinc roof
Packaging	120 pcs/bundle

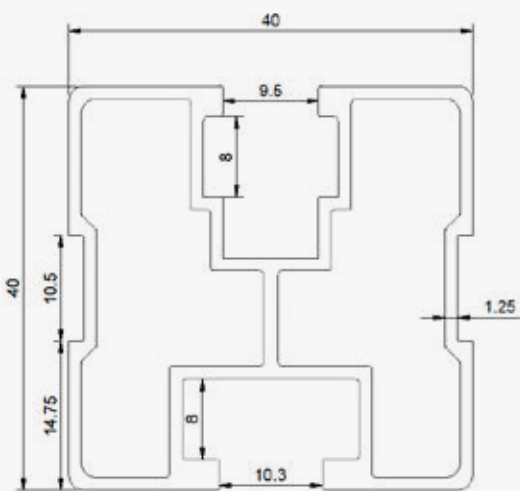


*These values do not include safety margin and only apply to setups where the profile is evenly supported by 3 points. ProMount is not responsible for incorrect use.

Maximum load (kg)*	Span (m)				
	1,20	1,30	1,40	1,50	1,60
0°	136	125	116	109	102
22°	132	122	113	105	99
45°	144	133	124	116	108

Profile Feather

Article code	1HME43AL035 (6,00 m alu)
	1HME43ZW044 (6,00 m black)
Material	ALU6063T5
Color	alu / black
Weight	600 gr / m
Application	tiled roof, steel deck roof, corrugated roof, slate roof, zinc roof
Packaging	120 pcs/bundle

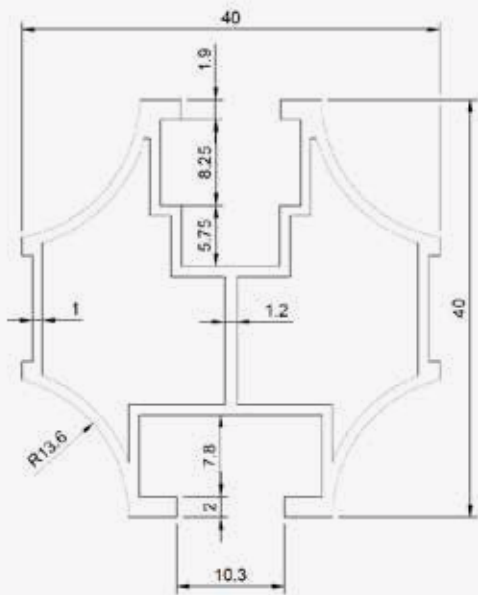


*These values do not include safety margin and only apply to setups where the profile is evenly supported by 3 points. ProMount is not responsible for incorrect use.

	Span (m)				
	1,20	1,30	1,40	1,50	1,60
Maximum load (kg)*					
0°	128	119	110	103	96
22°	151	139	129	120	113
45°	141	130	121	112	105

Profile connector 40 mm




Article code	1HMEACPV001 (alu) 1HMEACPV002 (black)
Material	ALU6063T5
Color	alu / black
Weight	60 gr / m
Application	tilled roof, steel deck roof, corrugated roof, slate roof, zinc roof, house profile
Packaging	216 pcs/carton, 7.200 pcs/pallet

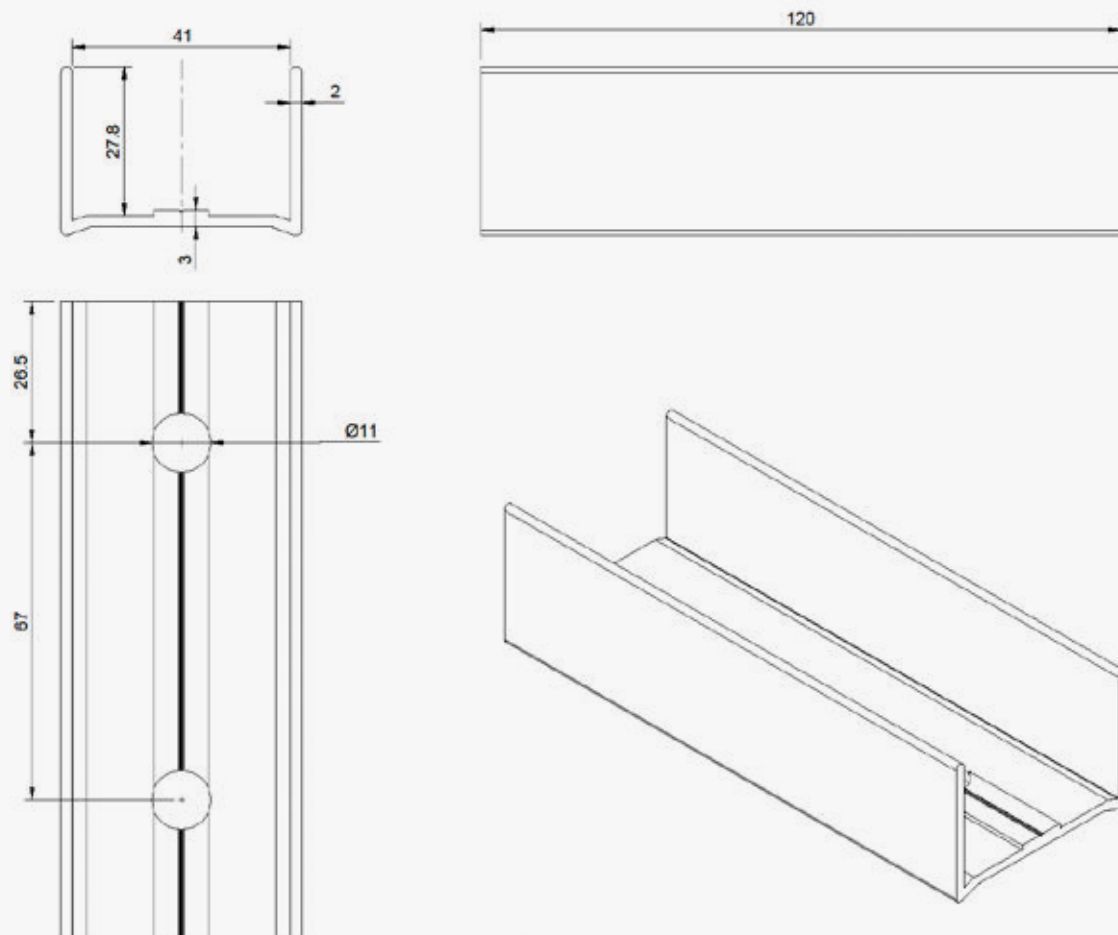

End cap for profile 40x40




Article code	1HMEACPS002 (grey) 1HME0ACPS001 (black)
Material	PE
Color	grey / black
Weight	10 gr
Application	tiled roof, steel deck roof, corrugated roof, slate roof, zinc roof, house profile
Packaging	50 pcs/bag, 500 pcs/carton, 6.000 pcs/pallet



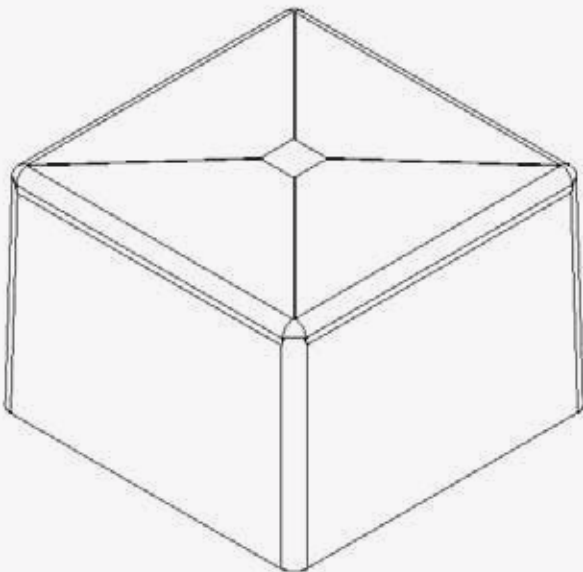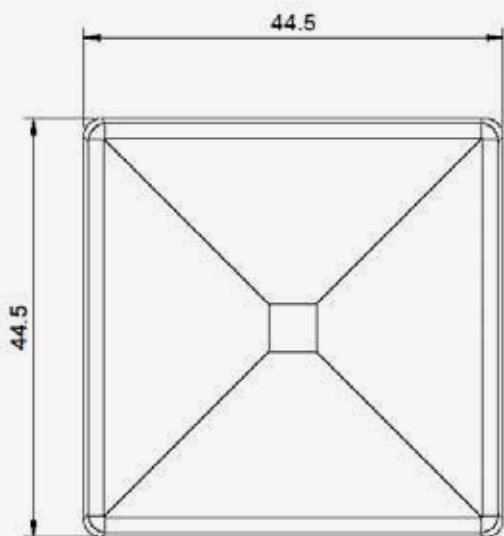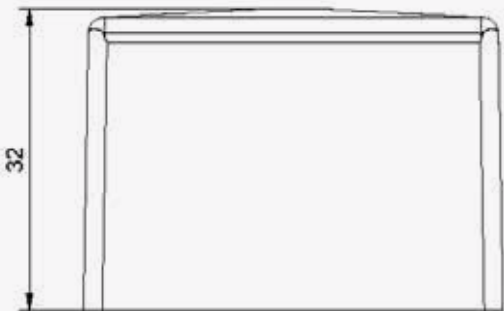

Middle clamp click 30-40 mm




Article code	1HME32KK003 (alu) 1HME32KK004 (black)
Material	ALU6063T5 + A2
Color	alu / black
Weight	70 gr
Application	tiled roof, steel deck roof, corrugated roof, zinc roof
Packaging	100 pcs/carton, 4.800 pcs/pallet

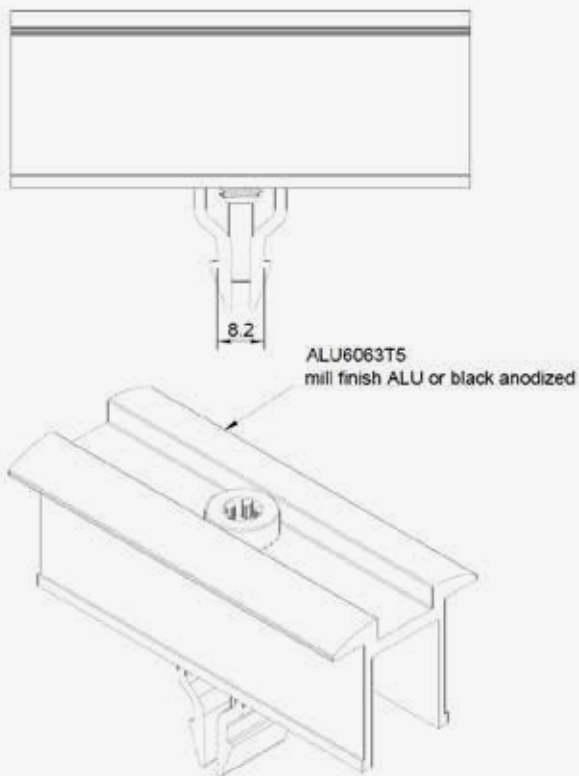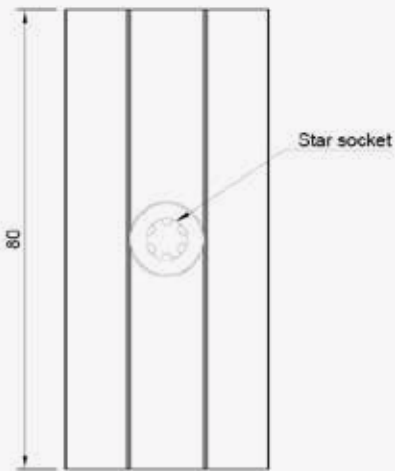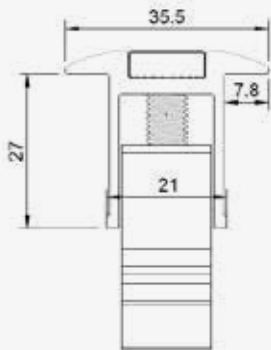

End clamp click



30x40 mm

Article code	1HME32KK024 (alu) 1HME32KK025 (black)
Material	ALU6063T5 + A2
Color	alu / black
Weight	80 gr
Application	tiled roof, steel deck roof, corrugated roof, zinc roof
Packaging	100 pcs/carton, 4.800 pcs/pallet

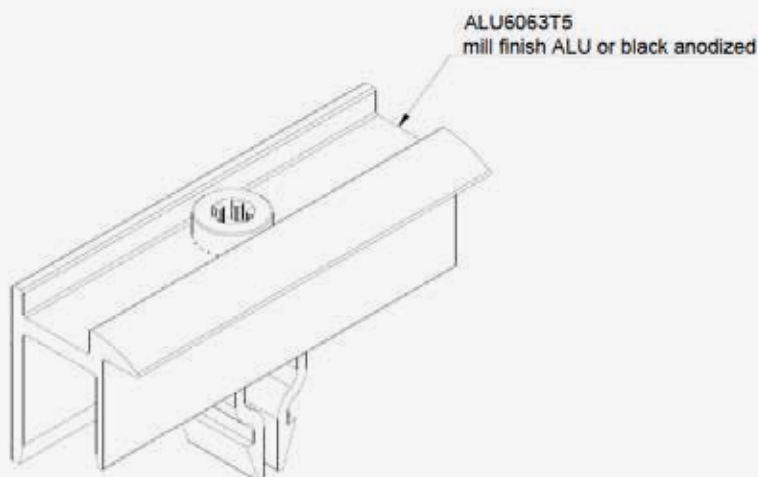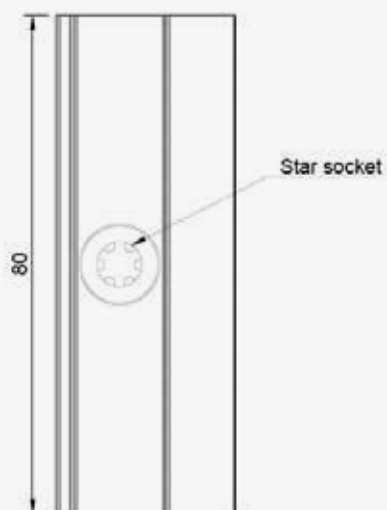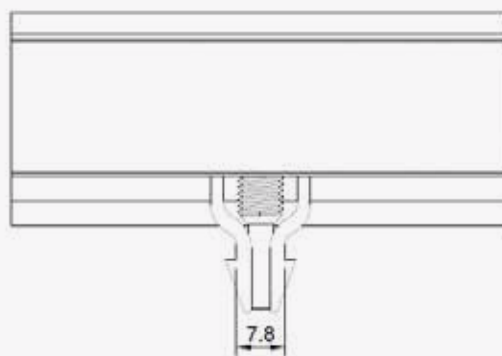

Middle clamp basic length 60 mm

Article code	1HME32SR085 (alu) 1HME32SR086 (black)
Material	ALU6063T5
Color	alu / black
Weight	50 gr
Application	tiled roof, steel deck roof, corrugated roof, slate roof, zinc roof, flat roof
Packaging	100 pcs/carton, 9.000 pcs/pallet



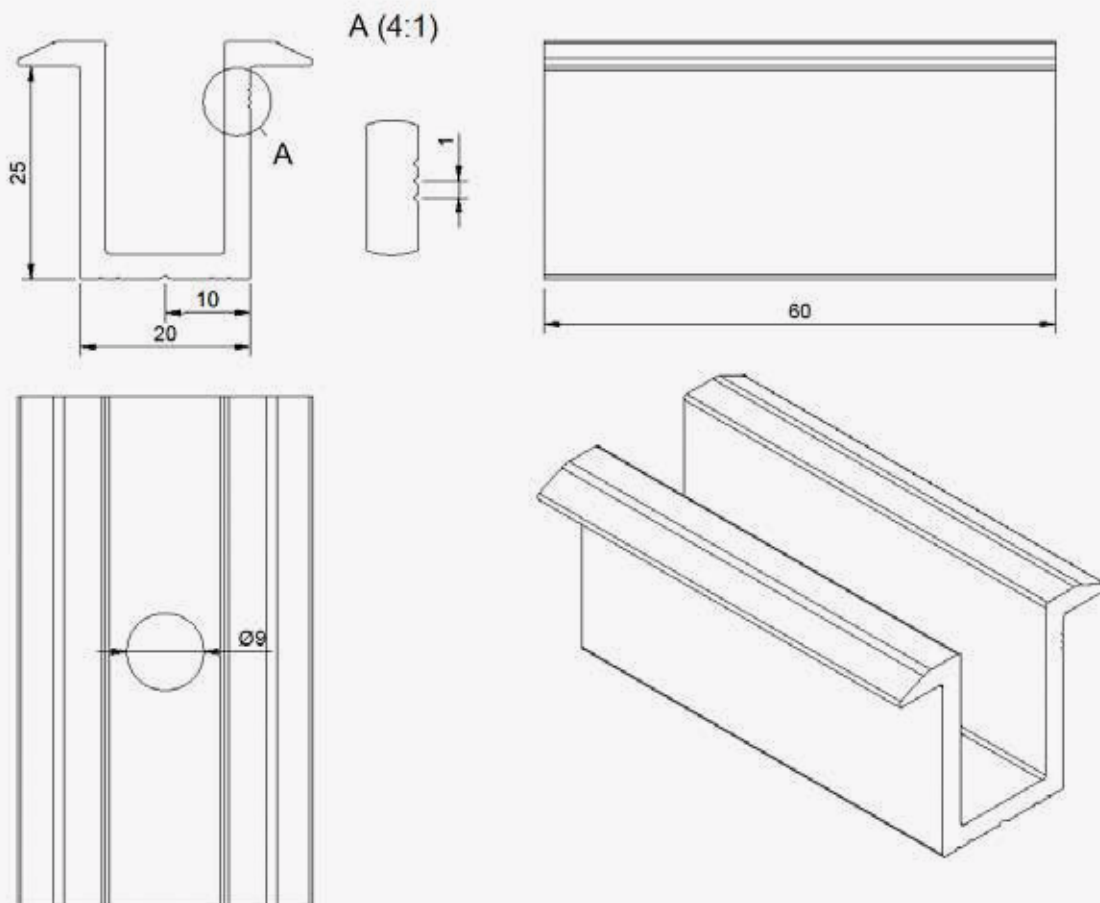
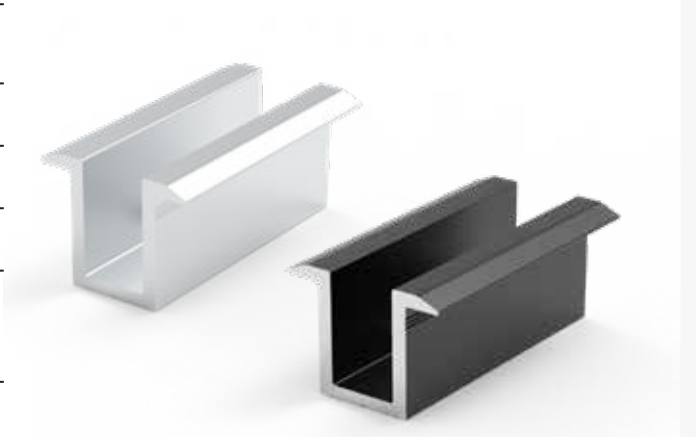


End clamp 30 mm length 60 mm

Coming soon!

All our clamps will soon be
equipped with grounding.

Article code	1HME32SR069 (alu)
Material	ALU6063T5
Color	alu / black
Weight	30 gr
Application	tiled roof, steel deck roof, corrugated roof, slate roof, zinc roof, flat roof
Packaging	300 pcs/carton, 30.000 pcs/pallet



	alu	black	weight
30 mm	1HME32SR069	1HME32SR096	30 gr
35 mm	1HME32SR071	1HME32SR072	30 gr

Hex bolt M10x30

Knurled nut M10





Hex bolt M10x30

Article code	1HME10BT037
Material	SSA2
Color	SS
Weight	25 gr
Application	tilled roof, steel deck roof, corrugated roof, slate roof, zinc roof
Packaging	100 pcs/carton, 30.000 pcs/pallet



Knurled nut M10

Article code	1HME10MR001
Material	SSA2
Color	SS
Weight	10 gr
Application	Hex bolt M10x30
Packaging	100 pcs/carton, 80.000 pcs/pallet

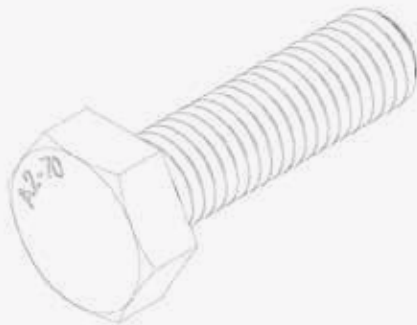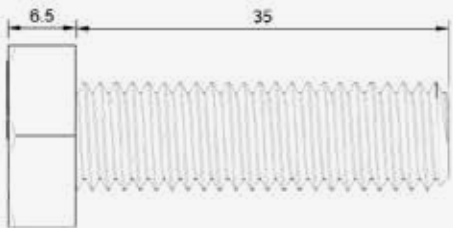

Allen bolt M8x20

Spring ball nut M8




Allen bolt M8X20

Article code	1HME10BT015
Material	SSA2
Color	SS
Application	tilted roof, steel deck roof, corrugated roof, slate roof, zinc roof
Packaging	100 pcs/carton



Knurled nut M10


Article code	1HME10MR004
Material	SSA2 + ALU6061
Color	SS
Weight	4 gr
Application	Allen bolt M8
Packaging	100 pcs/carton

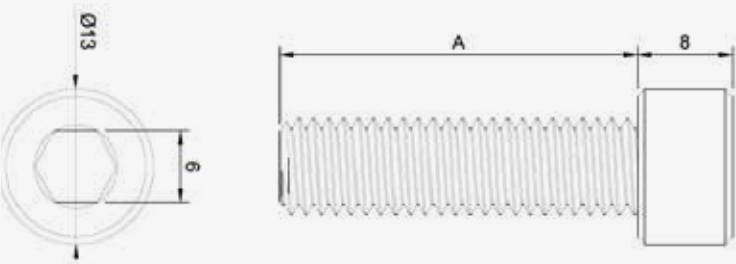

	alu	kg
M8x20	1HME10BT015	0,01
M8x30	1HME10BT019	0,02

Wood screw 8x80 T40


Article code	1HME46HT004(8x80 T40)
Material	SSA2
Color	SS
Weight	10 gr
Application	tiled roof, slate roof
Packaging	100 pcs/carton, 19.000 pcs/pallet

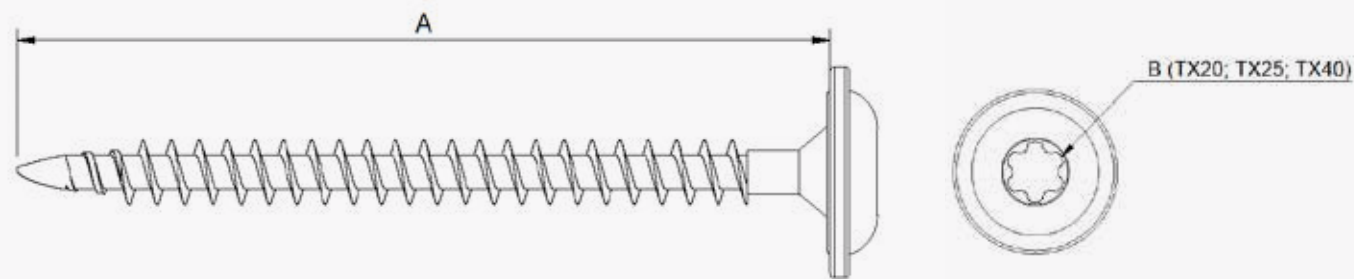

A	B		kg
6x70	TX25	1HME46HT001	0,01
8x80	TX40	1HME46HT004	0,02

Bi-metal screw for steel deck 6,0x25


Article code	1HME46BM003
Material	SSA2
Color	SS
Weight	10 gr
Application	steel deck roof
Packaging	100 pcs/carton, 50.000 pcs/pallet

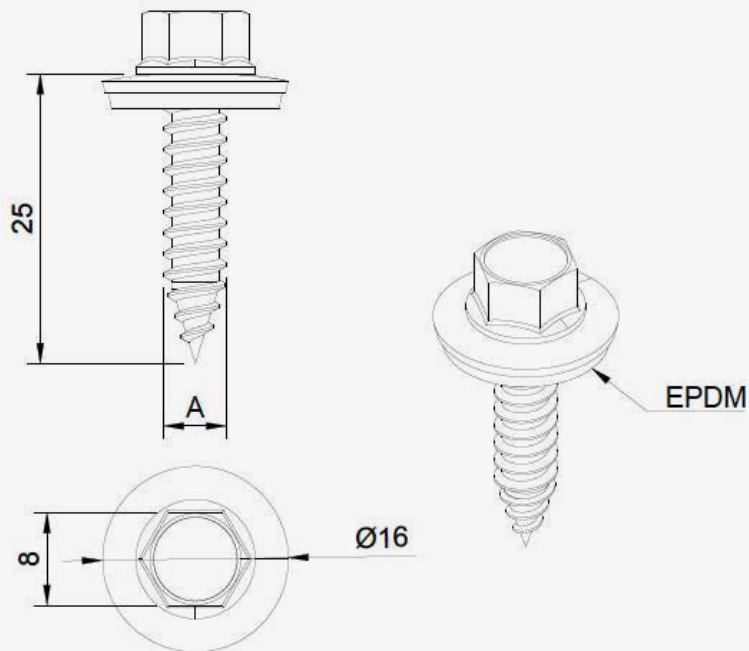

A		kg
4,5x25	1HME46BM001	0,01
6,0x25	1HME46BM003	0,01

ProMount calculator

Easily calculate and manage all your projects with our ProMount calculator for pitched roofs. Choose your location, roof type, solar panels and mounting system and you will immediately receive a complete project overview with corresponding bill of materials.

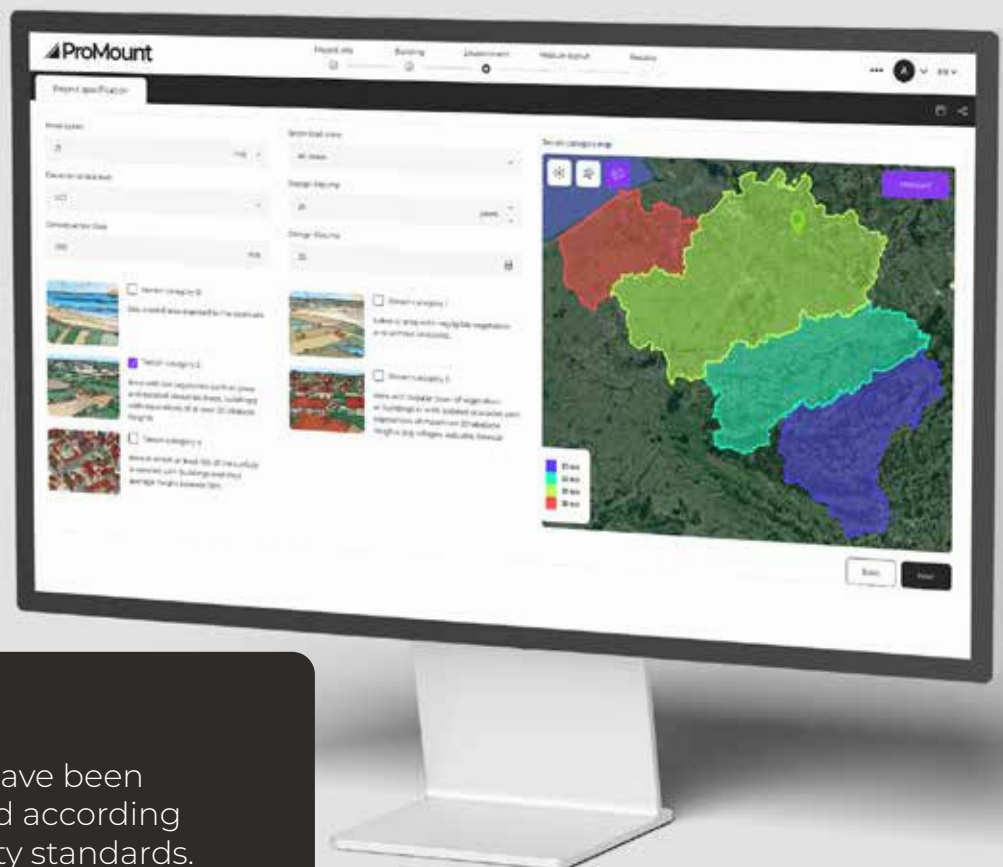

Feature

All calculations have been extensively tested according to the latest safety standards. You will receive a complete overview of all safety margins and permitted forces.

Discover our other mounting systems




INLAY

The well-known INLAY mounting system. You install solar panels quickly and easily by sliding them into the profiles. Without clamps!



SLIDE

SLIDE makes solar installations effortless on tile, corrugated and steeldeck roofs, offering flexible portrait or landscape mounting with a precise fit for every panel.

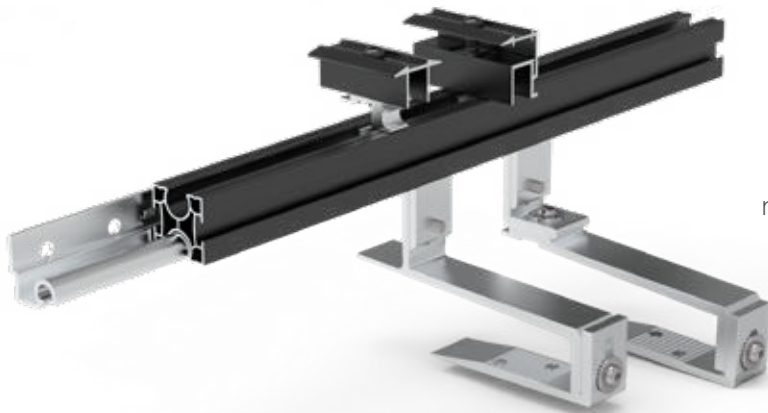

SOLARSPEED

The SOLARSPEED system for flat roofs is available in both south and east-west configurations and supports landscape and portrait mounting, making it flexible for use on a wide range of roof configurations.



